
LDZY® Electronics


A1258Series 1.25mm Pitch Series Wire to Board Connectors

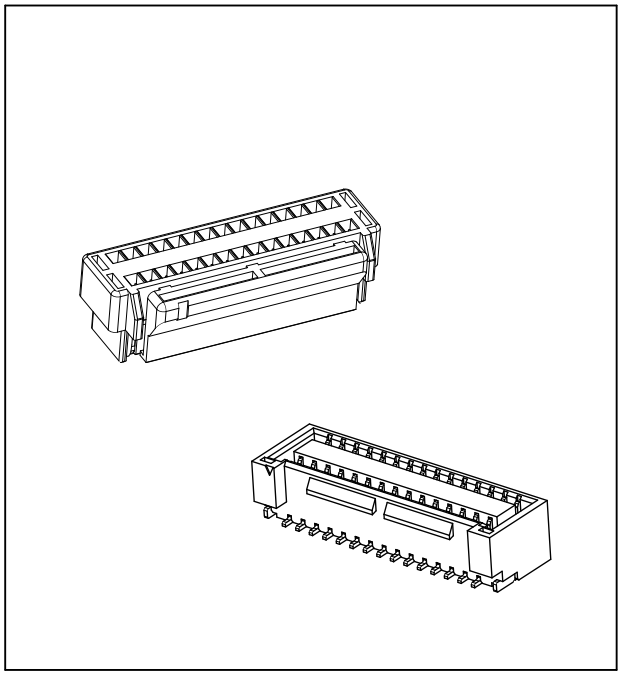


SPECIFICATIONS:

Voltage Rating：150V AC/DC
Current Rating：1A AC/DC
Withstanding Voltage：500V AC/Minute
Temperature Range：-25°C~+85°C
Insulation Resistance：1000MΩ Min.
Contact Resistance：30mΩ Max.
After Environmental Testing：50mΩ/Max
*Mates with LDZY A1258 series Wafer

Assembly Layout:



A1258H-2NP-N0NA 1.25mm Pitch Double Row Housing

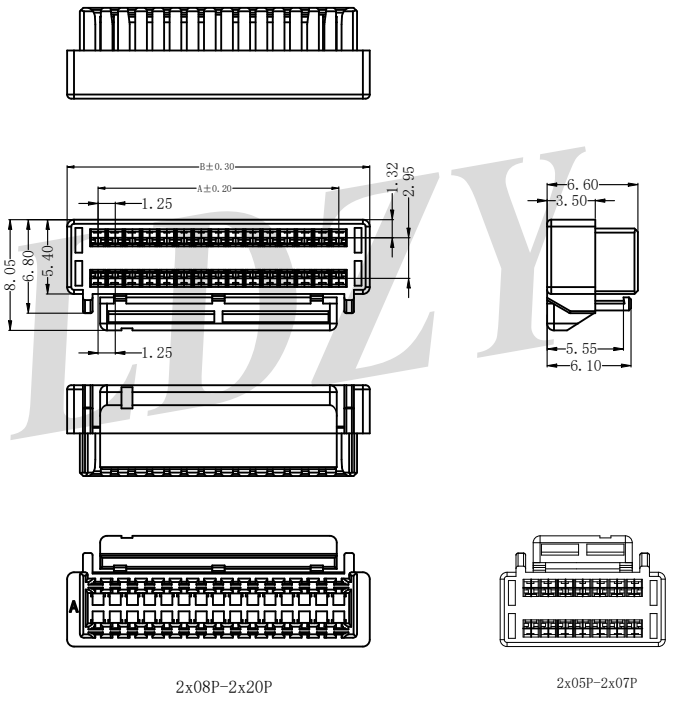

2x08P-2x20P

2x05P-2x07P

Reference Informations:
*Material:
Housing: PA66 UL94V-0/ Natrual
*Suitable LDZY A1258 series Terminal
*Mates with LDZY A1258 series Wafer

Ordering Information & Dimensions


Contacts	Dimensions(mm)	
	Dim A	Dim B
2x05	5.00	9.50
2x06	6.25	10.75
2x07	7.50	12.00
2x08	8.75	13.25
2x09	10.00	14.50
2x10	11.25	15.75
2x11	12.50	17.00
2x12	13.75	18.25
2x13	15.00	19.50
2x14	16.25	20.75
2x15	17.50	22.00
2x16	18.75	23.25
2x18	21.25	25.75
2x19	22.50	27.00
2x20	23.75	28.25

LDZY

A1258 Series 1.25mm Pitch Series Wire to Board Connectors

A1258TF-PT1 1.25mm Pitch Terminal


Reference Informations:
*Material: Phosphor Bronze/Tin-plated
*Mates with LDZY A1258 series Housing

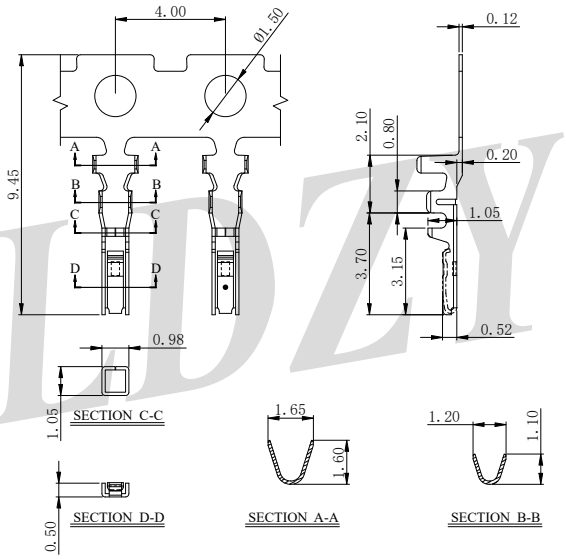

Ordering Information & Specifications

Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
A1258TF-PT1	AWG#32-#26	1.00mm(max)	Phosphor Bronze	Tin-plated	20,000pcs

A1258WVS-NP-L0NAX 1.25mm Pitch 180° SMT Double Row Wafe

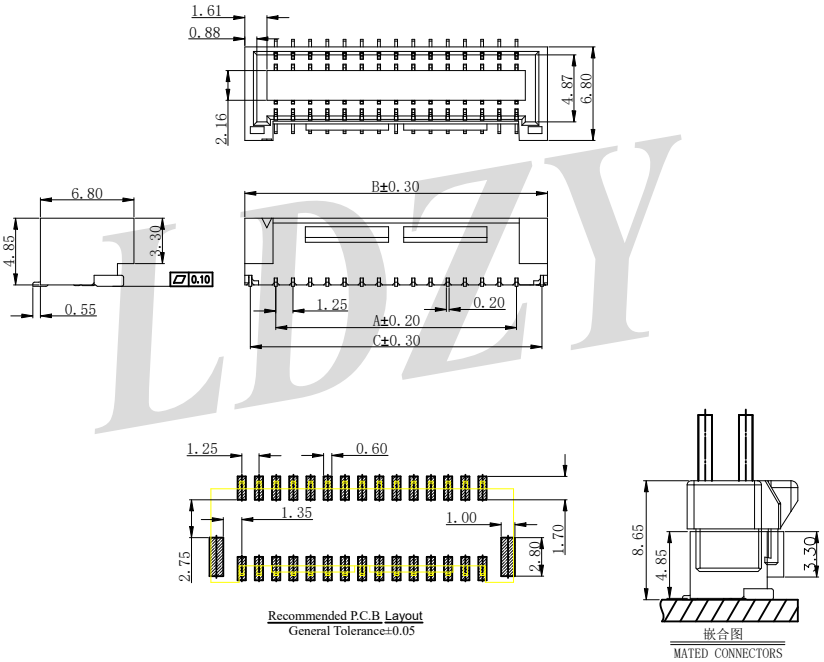

Reference Informations:
*Material:
Wafer: LCP,UL94V-0, Natural.
PIN: Phosphor Bronze Solder Tabs:Brass
Plating Method：Gold plated Or Tin-Plated
*Suitable LDZY A1258series Housing

Ordering Information & Dimensions

Poles	Dimension mm		
	A	B	C
2*5P	5.00	9.50	8.70
2*6P	6.25	10.75	9.95
2*7P	7.50	12.00	11.20
2*8P	8.75	13.25	12.45
2*9P	10.00	14.50	13.70
2*10P	11.25	15.75	14.95
2*11P	12.50	17.00	16.20
2*12P	13.75	18.25	17.45
2*13P	15.00	19.50	18.70
2*14P	16.25	20.75	19.95
2*15P	17.50	22.00	21.20
2*16P	18.75	23.25	22.45
2*17P	20.00	24.50	23.70
2*18P	21.25	25.75	24.95
2*19P	22.50	27.00	26.20
2*20P	23.75	28.25	27.45