

A2019 Series 2.00mm Pitch Series Wire to Board Connectors

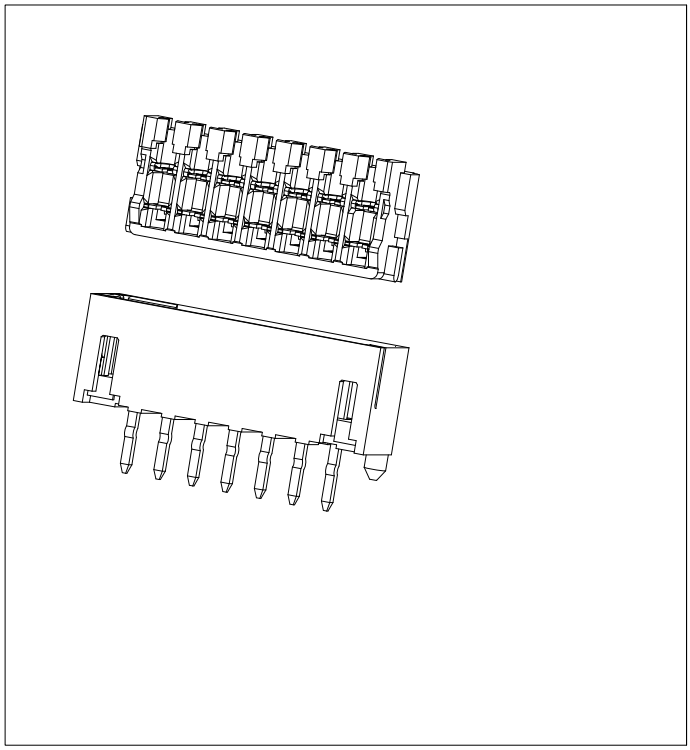


SPECIFICATIONS:

Voltage Rating：250V AC/DC
Current Rating：3A AC/DC
Withstanding Voltage：800V AC/Minute
Temperature Range：-25°C~+85°C
Insulation Resistance：1000MΩ Min.
Contact Resistance：10mΩ Max.
Applicable Wire Range：AWG#26~30.

Assembly Layout:

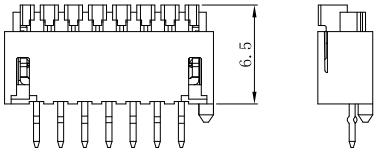

A2019HI-NP-N0CWT 2.00mm Pitch Single Row Housing

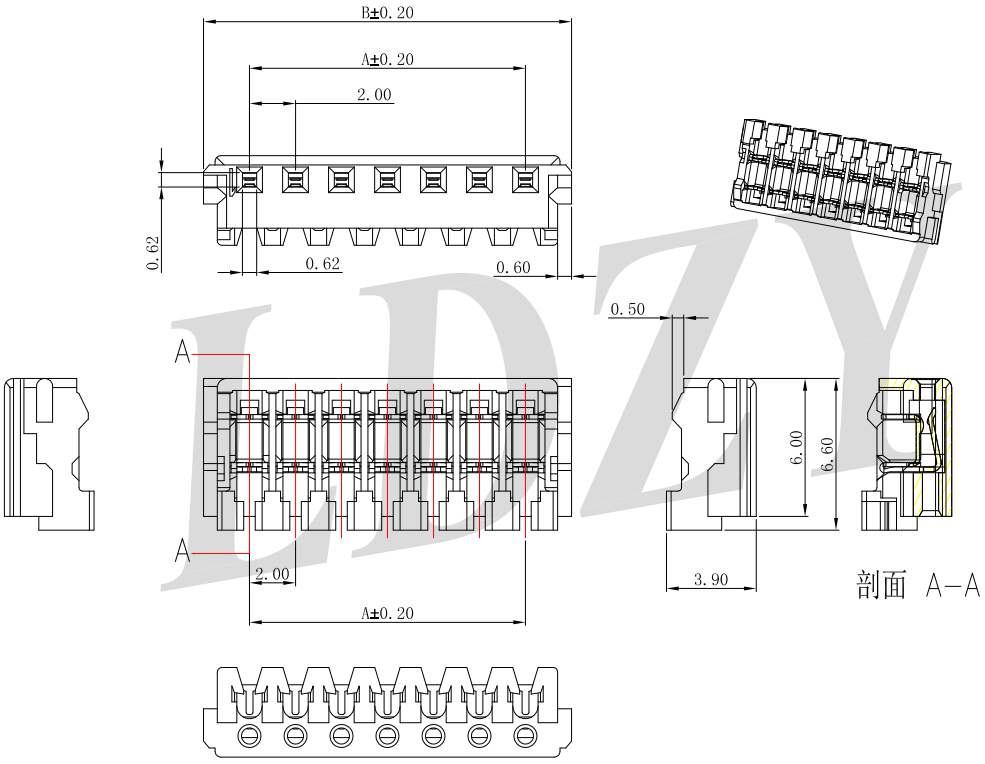


Reference Informations:
Plastic Materia：PA66+30%GF UL94V-0,
Color： Creamy White.
Contacts Material：Brass.
Finish：Tin-plated

Ordering Information & Dimensions

Poles	Dimensions (mm)	
	A	B
02	2.00	6.00
03	4.00	8.00
04	6.00	10.00
05	8.00	12.00
06	10.00	14.00
07	12.00	16.00
08	14.00	18.00
09	16.00	20.00
10	18.00	22.00
11	20.00	24.00
12	22.00	26.00
13	24.00	28.00
14	26.00	30.00
15	28.00	32.00

A2019 Series 2.00mm Pitch Series Wire to Board Connectors

A2019WV-NP-N0CWT 2.00mm Pitch 180° Single Row Wafer

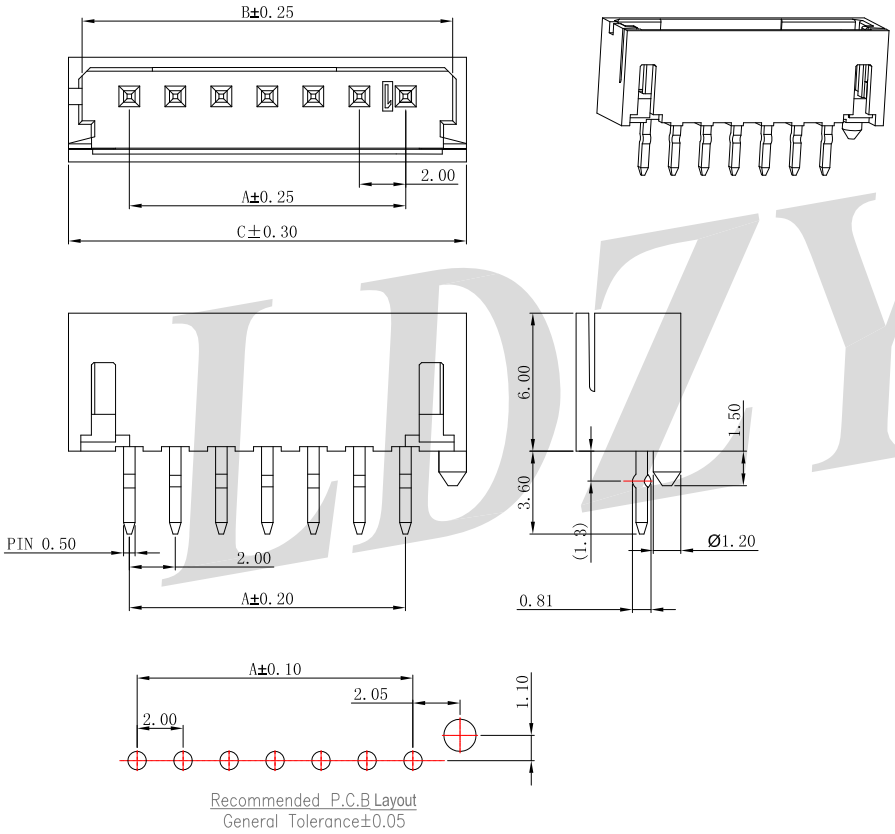


Reference Informations:
Plastic Materia：PA66+30%GF UL94V-0,
Color： Creamy White.
Pin Material：Brass.
Finish：Tin-plated

Ordering Information & Dimensions

Poles	Dimensions (mm)		
	A	B	C
02	2.00	6.10	7.30
03	4.00	8.10	9.30
04	6.00	10.10	11.30
05	8.00	12.10	13.30
06	10.00	14.10	15.30
07	12.00	16.10	17.30
08	14.00	18.10	19.30
09	16.00	20.10	21.30
10	18.00	22.10	23.30
11	20.00	24.10	25.30
12	22.00	26.10	27.30
13	24.00	28.10	29.30
14	26.00	30.10	31.30
15	28.00	32.10	33.30

A2019WR-NP-P0WHT 2.00mm Pitch 90° Single Row Wafer

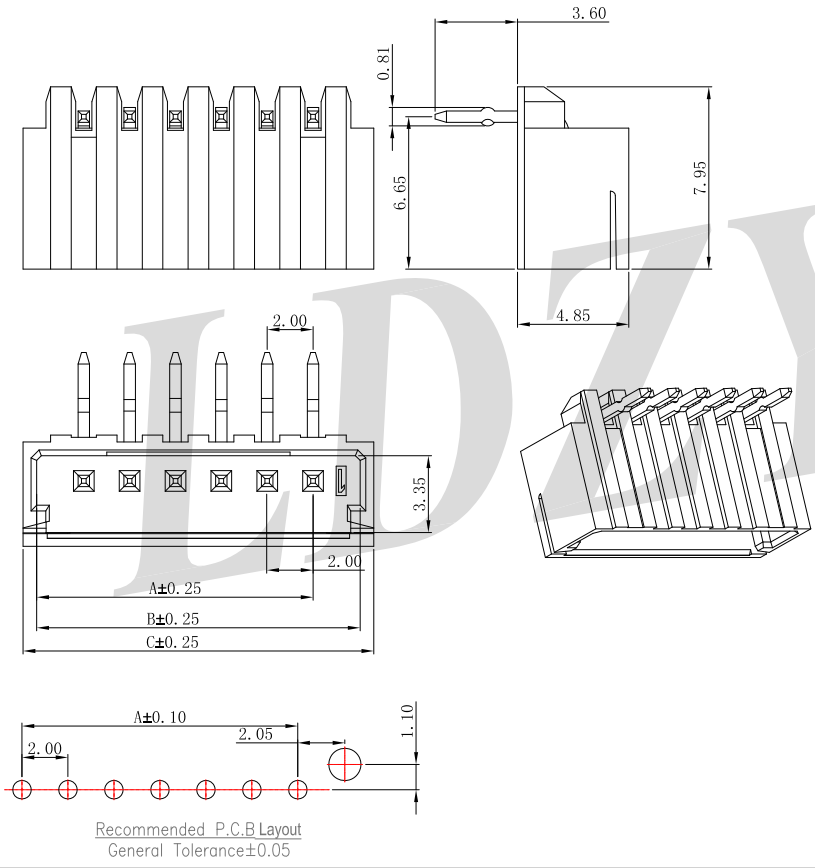

Reference Informations:
Plastic Materia：PBT+15%GF UL94V-0,
Color： White.
Pin Material：Brass.
Finish：Tin-plated

Ordering Information & Dimensions

Poles	Dimensions (mm)		
	A	B	C
02	2.00	6.10	7.30
03	4.00	8.10	9.30
04	6.00	10.10	11.30
05	8.00	12.10	13.30
06	10.00	14.10	15.30
07	12.00	16.10	17.30
08	14.00	18.10	19.30
09	16.00	20.10	21.30
10	18.00	22.10	23.30
11	20.00	24.10	25.30
12	22.00	26.10	27.30
13	24.00	28.10	29.30
14	26.00	30.10	31.30
15	28.00	32.10	33.30

LDZY