

A2546 Series 2.54mm Pitch Series Wire to Board Connectors

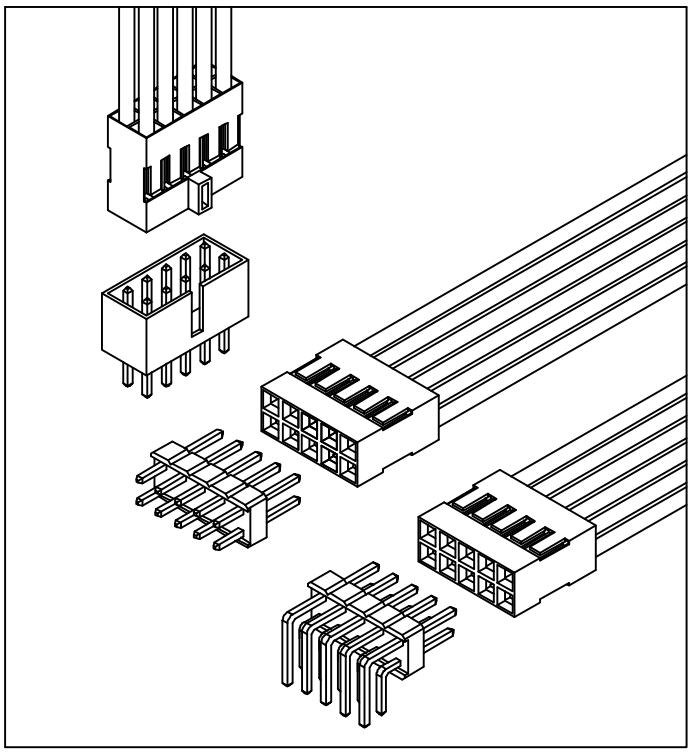


SPECIFICATIONS:

Voltage Rating：250V AC/DC
Current Rating：3A AC/DC
Withstanding Voltage：1500V AC/Minute
Temperature Range：-25°C~+85°C
Insulation Resistance：1000MΩ Min.
Contact Resistance：20mΩ Max.
Applicable Wire Range：AWG#22~26.

Assembly Layout:

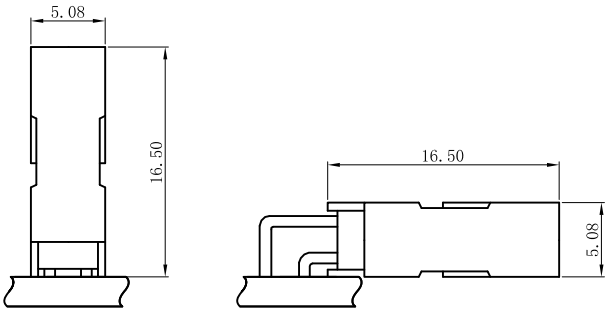

A2546H-2NP-PPBK 2.54mm Pitch Dual Row Housing

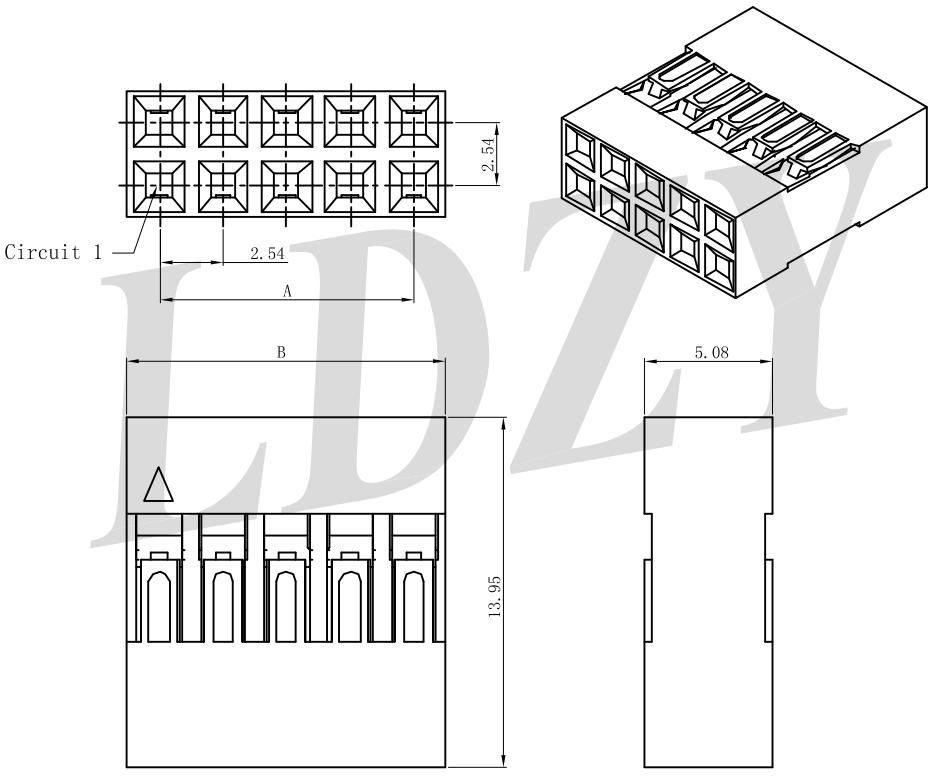


Reference Informations:
*Material:
Housing: PPO UL94V-0/Black
*Suitable LDZY A2546 series Terminal
Ordering Information & Dimensions

Poles	Dimensions (mm)		Poles	Dimensions (mm)	
	A	B		A	B
2*2P	2.54	5.08	2*22P	53.34	55.88
2*3P	5.08	7.62	2*23P	55.88	58.42
2*4P	7.62	10.16	2*24P	58.42	60.96
2*5P	10.16	12.70	2*25P	60.96	63.50
2*6P	12.70	15.24	2*26P	63.50	66.04
2*7P	15.24	17.78	2*27P	66.04	68.58
2*8P	17.78	20.32	2*28P	68.58	71.12
2*9P	20.32	22.86	2*29P	71.12	73.66
2*10P	22.86	25.40	2*30P	73.66	76.20
2*11P	25.40	27.94	2*31P	76.20	78.74
2*12P	27.94	30.48	2*32P	78.74	81.28
2*13P	30.48	33.02	2*33P	81.28	83.82
2*14P	33.02	35.56	2*34P	83.82	86.36
2*15P	35.56	38.10	2*35P	86.36	88.90
2*16P	38.10	40.64	2*36P	88.90	91.44
2*17P	40.64	43.18	2*37P	91.44	93.98
2*18P	43.18	46.72	2*38P	93.98	96.52
2*19P	45.72	48.26	2*39P	96.52	99.06
2*20P	48.26	50.80	2*40P	99.06	101.60
2*21P	50.80	53.34			

LDZY

A2546 Series 2.54mm Pitch Series Wire to Board Connectors


A2546HA-2NP-PPBK 2.54mm Pitch Dual Row Housing

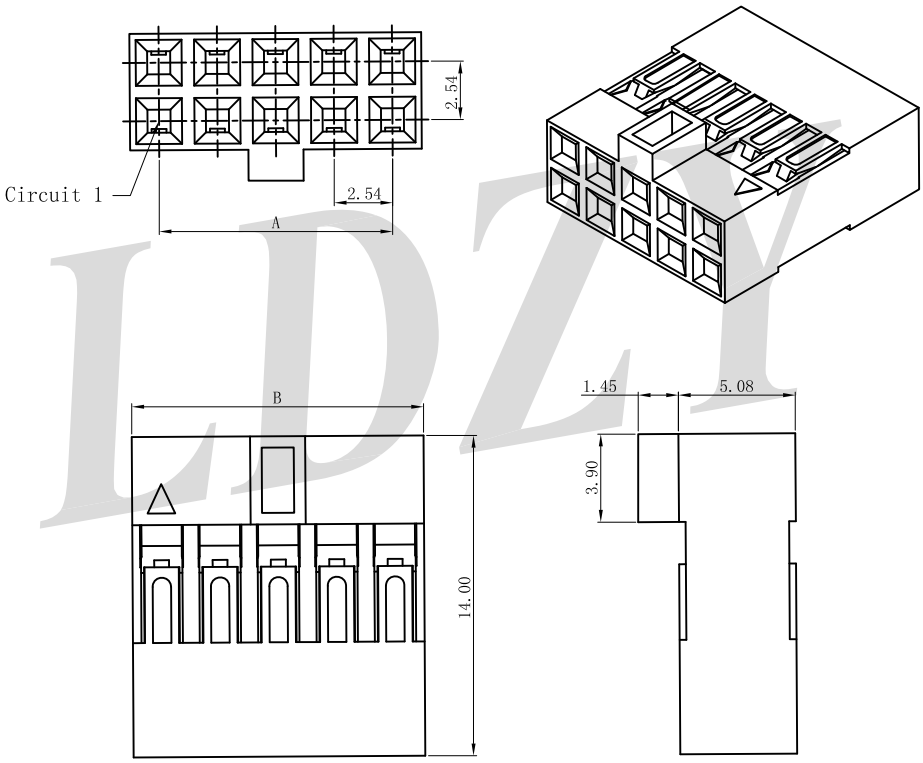

Reference Informations:
*Material:
Housing: PPO UL94V-0/Black
*Suitable LDZY A2546 series Terminal
Ordering Information & Dimensions

Poles	Dimensions (mm)		Poles	Dimensions (mm)	
	A	B		A	B
2*2P	2.54	5.08	2*22P	53.34	55.88
2*3P	5.08	7.62	2*23P	55.88	58.42
2*4P	7.62	10.16	2*24P	58.42	60.96
2*5P	10.16	12.70	2*25P	60.96	63.50
2*6P	12.70	15.24	2*26P	63.50	66.04
2*7P	15.24	17.78	2*27P	66.04	68.58
2*8P	17.78	20.32	2*28P	68.58	71.12
2*9P	20.32	22.86	2*29P	71.12	73.66
2*10P	22.86	25.40	2*30P	73.66	76.20
2*11P	25.40	27.94	2*31P	76.20	78.74
2*12P	27.94	30.48	2*32P	78.74	81.28
2*13P	30.48	33.02	2*33P	81.28	83.82
2*14P	33.02	35.56	2*34P	83.82	86.36
2*15P	35.56	38.10	2*35P	86.36	88.90
2*16P	38.10	40.64	2*36P	88.90	91.44
2*17P	40.64	43.18	2*37P	91.44	93.98
2*18P	43.18	46.72	2*38P	93.98	96.52
2*19P	45.72	48.26	2*39P	96.52	99.06
2*20P	48.26	50.80	2*40P	99.06	101.60
2*21P	50.80	53.34			

A2546HB-2NP-PPBK 2.54mm Pitch Dual Row Housing

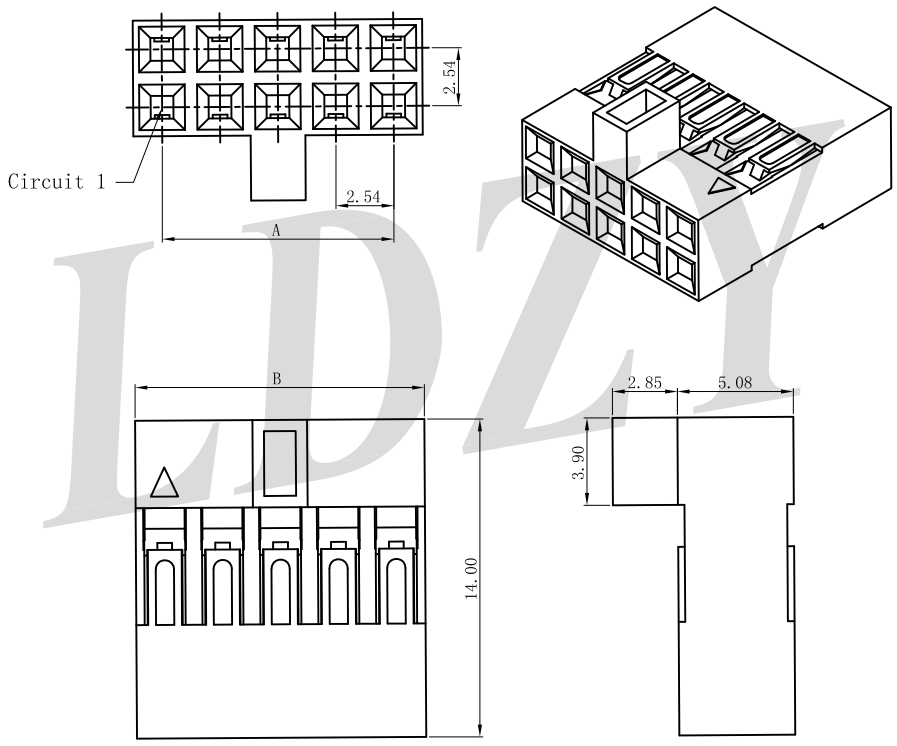



Reference Informations:
*Material:
Housing: PPO UL94V-0/Black
*Suitable LDZY A2546 series Terminal
Ordering Information & Dimensions

Poles	Dimensions (mm)	
	A	B
2*2P	2.54	5.08
2*3P	5.08	7.62
2*4P	7.62	10.16
2*5P	10.16	12.70
2*6P	12.70	15.24
2*7P	15.24	17.78
2*8P	17.78	20.32
2*9P	20.32	22.86
2*10P	22.86	25.40
2*11P	25.40	27.94
2*12P	27.94	30.48
2*13P	30.48	33.02
2*14P	33.02	35.56
2*15P	35.56	38.10
2*16P	38.10	40.64
2*17P	40.64	43.18
2*18P	43.18	46.72
2*19P	45.72	48.26
2*20P	48.26	50.80


A2546 Series 2.54mm Pitch Series Wire to Board Connectors


A2546TF-PT1 2.54mm Pitch Terminal

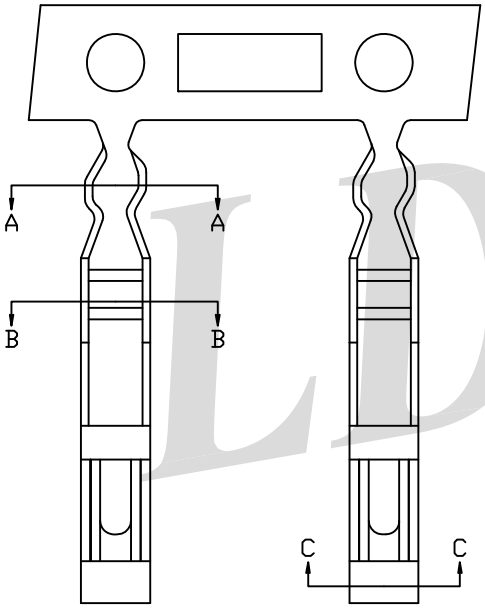

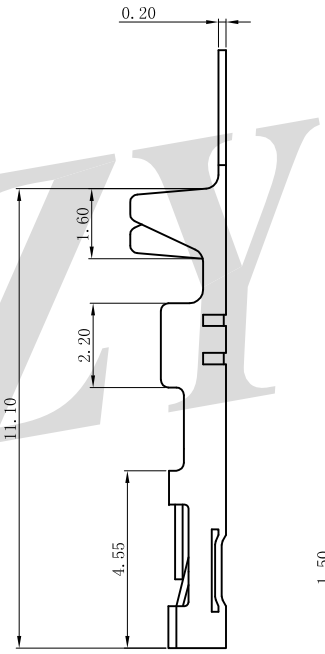

Reference Informations:
*Material: Phosphor Bronze /Tin-plated
*Mates with LDZY A2546series Housing

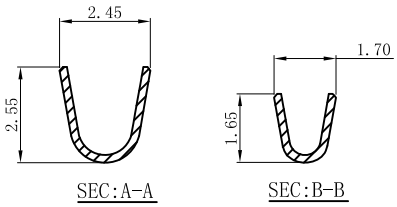



Ordering Information & Specifications

Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
A2546TF-PT1	AWG#22-#26	1.63mm(max)	Phosphor Bronze	Tin-plated	10,000pcs

LDZY