

B1502 Series 1.50mm Pitch Series Board to Board Connectors

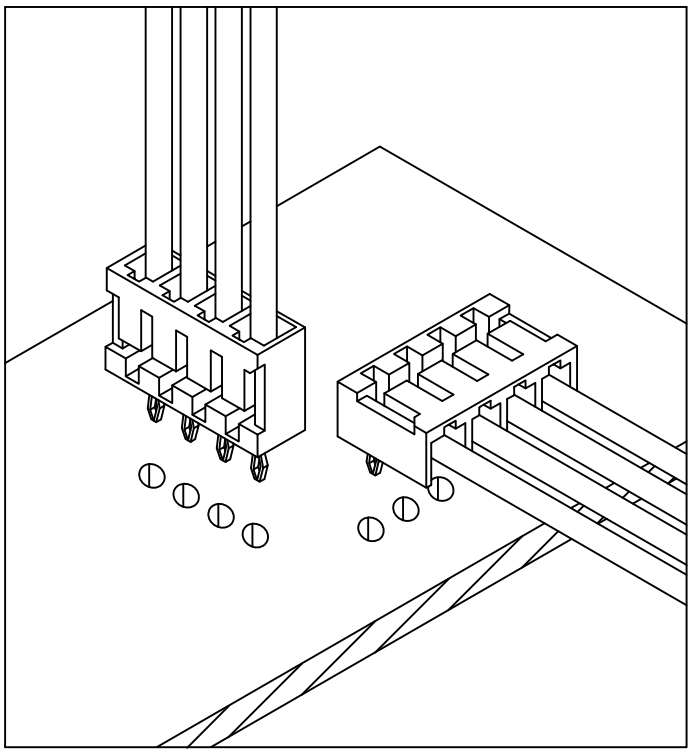


SPECIFICATIONS:

Voltage Rating：200V AC/DC
Current Rating：1A AC/DC
Withstanding Voltage：500V AC/Minute
Temperature Range：-25°C~+85°C
Insulation Resistance：500MΩ Min.
Contact Resistance：20mΩ Max.
Applicable Wire Range：AWG#28~30.

Assembly Layout:

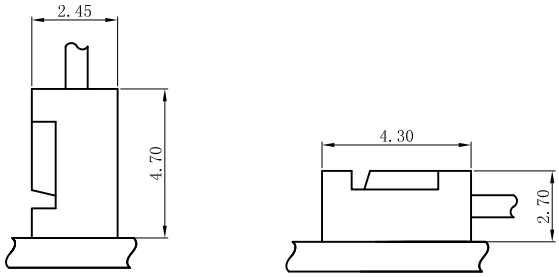

B1502HR-NP-N0NA 1.50mm Pitch Single Row Housing

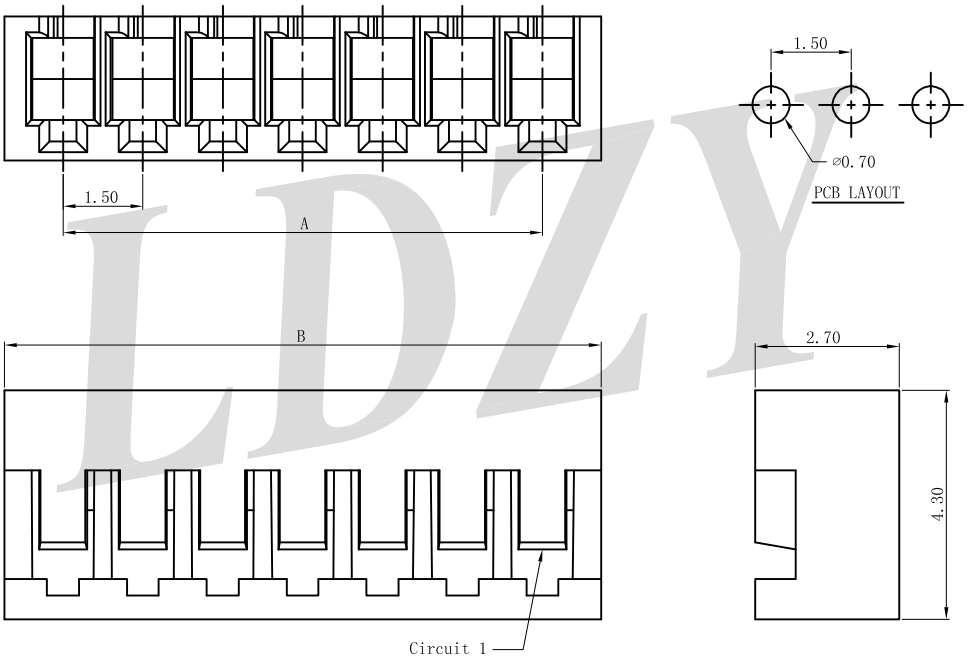


Reference Informations:
*Material:
Housing: PA66 UL94V-0/Natural
*Suitable LDZY B1502 series Terminal
Ordering Information & Dimensions

Poles	Dimensions (mm)	
	A	B
02	1.50	3.70
03	3.00	5.20
04	4.50	6.70
05	6.00	8.20
06	7.50	9.70
07	9.00	11.20
08	10.50	12.70
09	12.00	14.20
10	13.50	15.70
11	15.00	17.20
12	16.50	18.70
13	18.00	20.20
14	19.50	21.70

LDZY

B1502TV-PT1 1.50mm Pitch Terminal

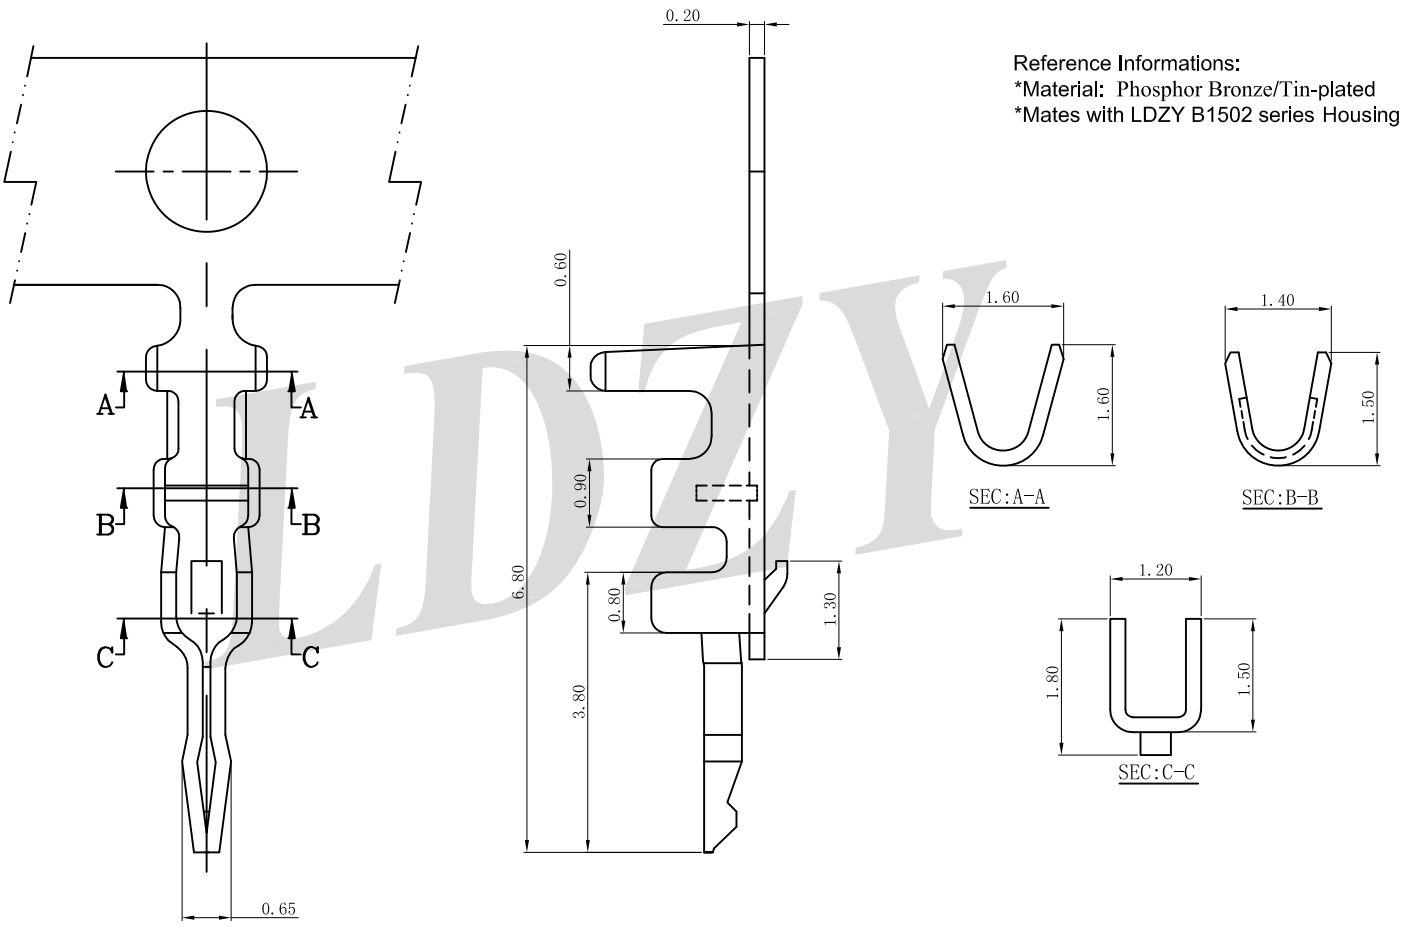


Reference Informations:
*Material: Phosphor Bronze/Tin-plated
*Mates with LDZY B1502 series Housing

Ordering Information & Specifications

Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
B1502TV-PT1	AWG#26-#30	1.00mm(max)	Phosphor Bronze	Tin-plated	15,000pcs

B1502 Series 1.50mm Pitch Series Board to Board Connectors

B1502HV-NP-NONA 1.50mm Pitch Single Row Housing

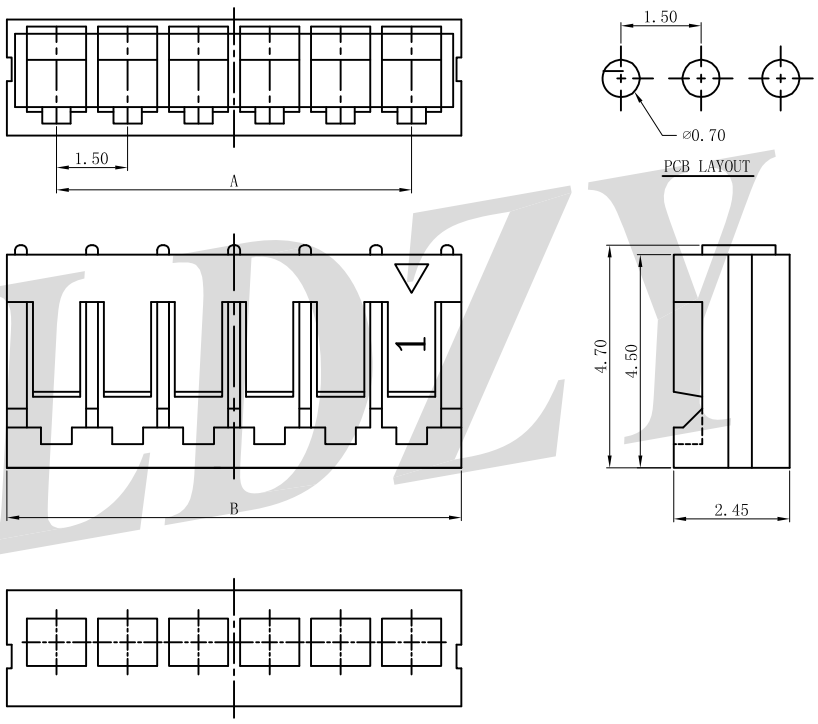


Reference Informations:
*Material:
Housing: PA66 UL94V-0/Natural
*Suitable LDZY B1502 series Terminal
Ordering Information & Dimensions

Poles	Dimensions (mm)	
	A	B
02	1.50	3.60
03	3.00	5.10
04	4.50	6.60
05	6.00	8.10
06	7.50	9.60
07	9.00	11.10
08	10.50	12.60
09	12.00	14.10
10	13.50	15.60
11	15.00	17.10
12	16.50	18.60
13	18.00	20.10
14	19.50	21.60

B1502TR-BT1 1.50mm Pitch Terminal

Reference Informations:
*Material: Brass/Tin-plated
*Mates with LDZY B1502 series Housing

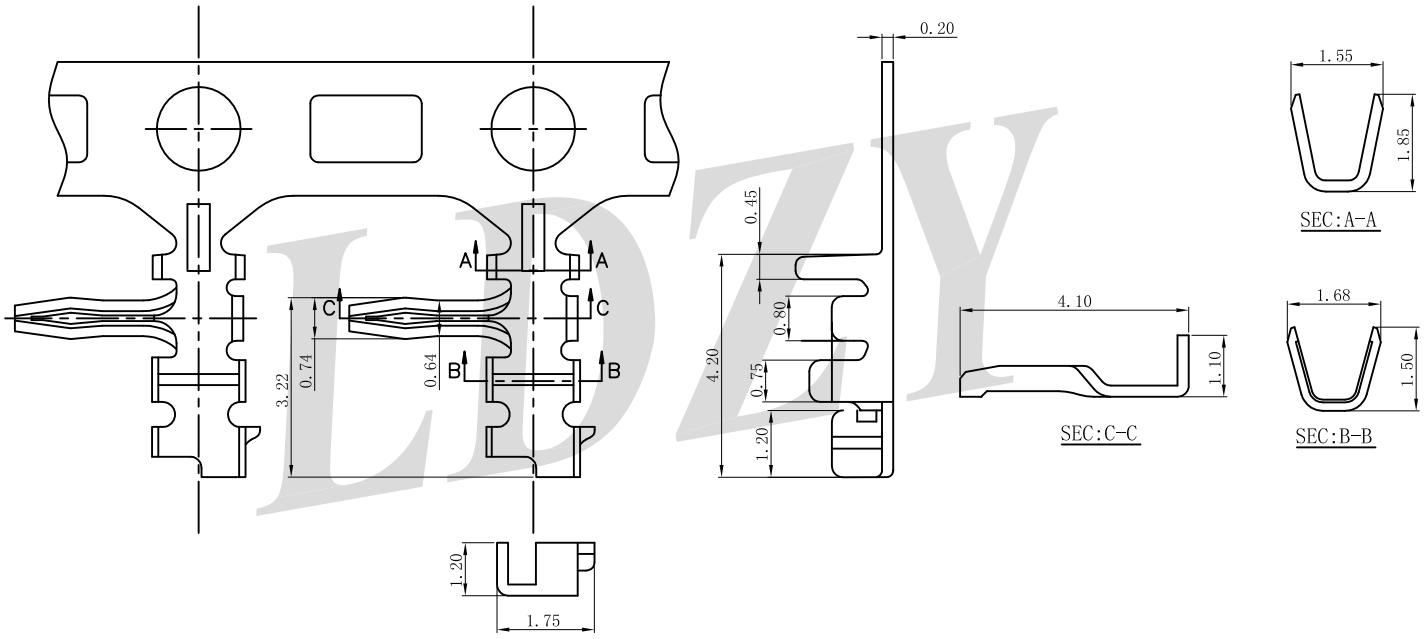

Ordering Information & Specifications

Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
B1502TR-BT1	AWG#28-#30	1.00mm(max)	Brass	Tin-plated	10,000pcs