
B2550 Series 2.54mm Pitch Series Board to Board Connectors

SPECIFICATIONS:

Voltage Rating：60V AC/DC
Current Rating：3A AC/DC
Withstanding Voltage：500V AC/Minute
Temperature Range：-40°C~+105°C
Insulation Resistance：1000MΩ Min.
Contact Resistance：4mΩ Max.

Assembly Layout:

B2550WVA-2NP-PSBKT 2.54mm Pitch 180° Dual Row IC Seat

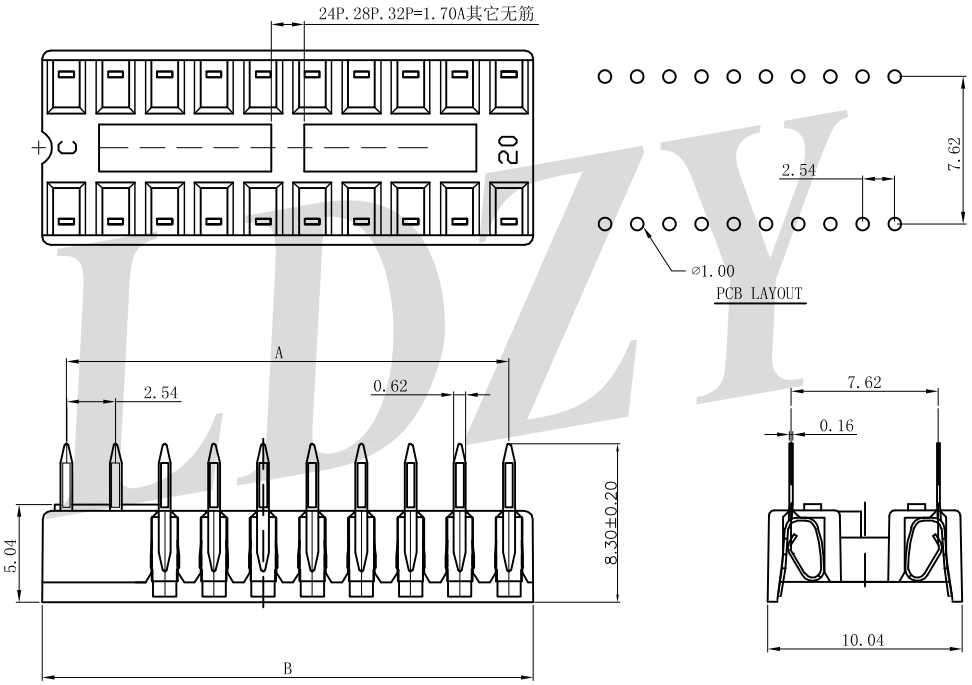


Reference Informations:
*Material:
Terminal: Phosphor Bronze/Tin-plated
Housing: PPS,UL94V-0 Black
Ordering Information & Dimensions

Poles	Dimensions (mm)	
	A	B
2*3	5.08	7.62
2*4	7.62	10.16
2*7	15.24	17.78
2*8	17.78	20.32
2*9	20.32	22.86
2*10	22.86	25.40
2*12	27.94	30.48
2*14	33.02	35.56
2*16	38.10	40.64

LDZY

B2550 Series 2.54mm Pitch Series Board to Board Connectors


B2550WVRS-NP-PSBKT 2.54mm Pitch 180° SMT Single Row IC Seat

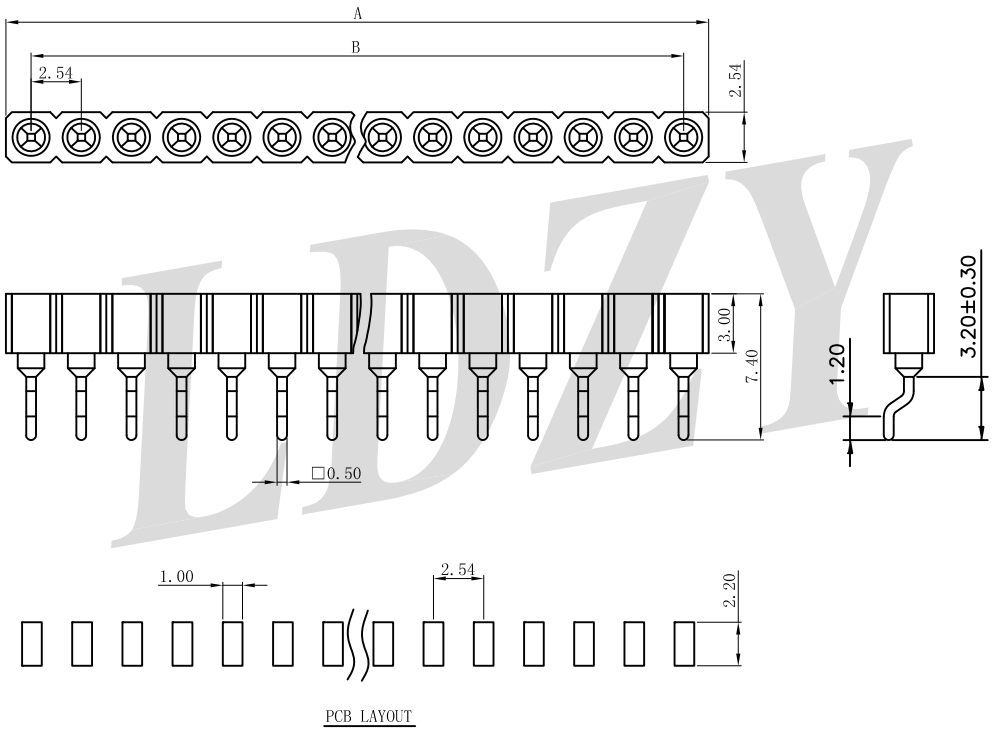

Reference Informations:
*Material:
Terminal: Phosphor Bronze/Tin-plated
Housing: PPS,UL94V-0 Black
Ordering Information & Dimensions

Poles	Dimensions (mm)	
	A	B
02	5.08	2.54
03	7.62	5.08
04	10.16	7.62
05	12.70	10.16
06	15.24	12.70
07	17.78	15.24
08	20.32	17.78
09	25.40	20.32
10	27.94	25.40
11	30.48	27.94
12	33.02	30.48
13	35.56	33.02
14	38.10	35.56
15	40.64	38.10
16	43.18	40.64
17	45.72	43.18
18	48.26	45.72
19	50.80	48.26
20	53.34	50.80

B2550WVR-NP-PSBKT 2.54mm Pitch 180° Single Row IC Seat

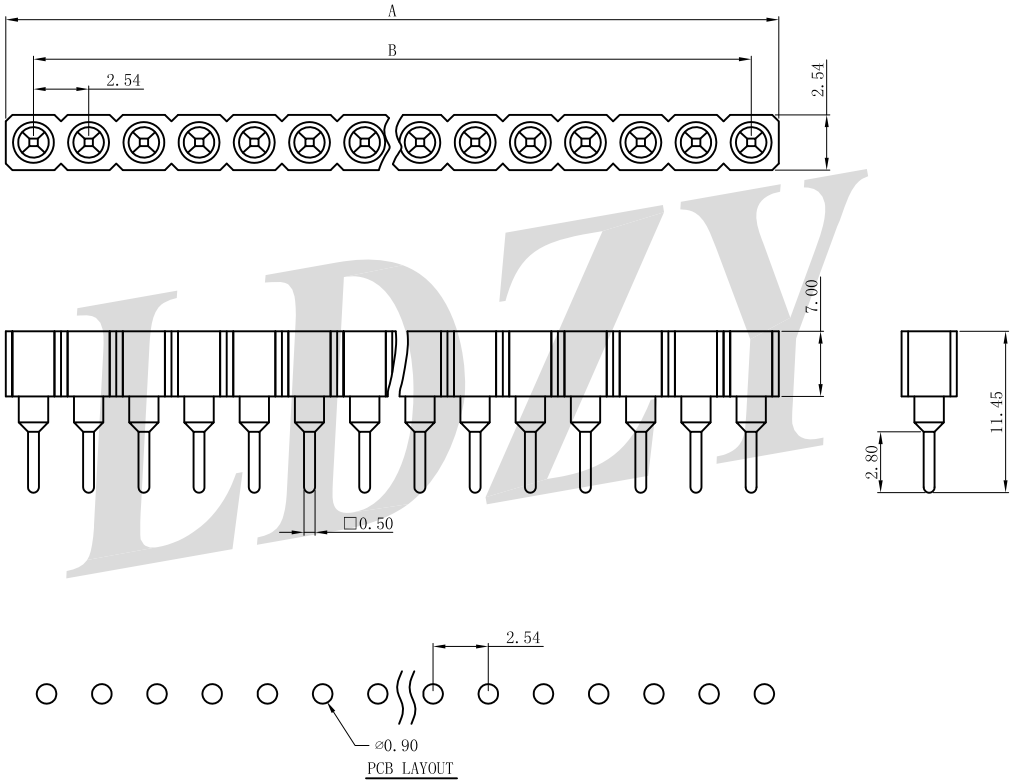


Reference Informations:
*Material:
Terminal: Phosphor Bronze/Tin-plated
Housing: PPS,UL94V-0 Black
Ordering Information & Dimensions


Poles	Dimensions (mm)	
	A	B
02	5.08	2.54
03	7.62	5.08
04	10.16	7.62
05	12.70	10.16
06	15.24	12.70
07	17.78	15.24
08	20.32	17.78
09	25.40	20.32
10	27.94	25.40
11	30.48	27.94
12	33.02	30.48
13	35.56	33.02
14	38.10	35.56
15	40.64	38.10
16	43.18	40.64
17	45.72	43.18
18	48.26	45.72
19	50.80	48.26
20	53.34	50.80


LDZY

B2550 Series 2.54mm Pitch Series Board to Board Connectors

B2550WVB-2NP-PSBKT 2.54mm Pitch 180° Dual Row IC Seat

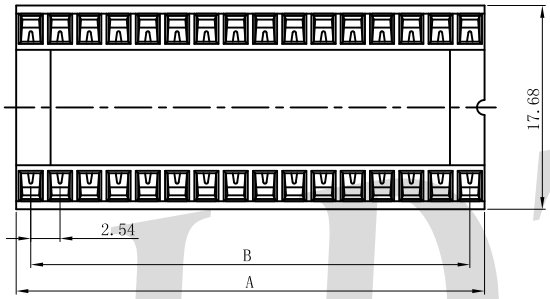

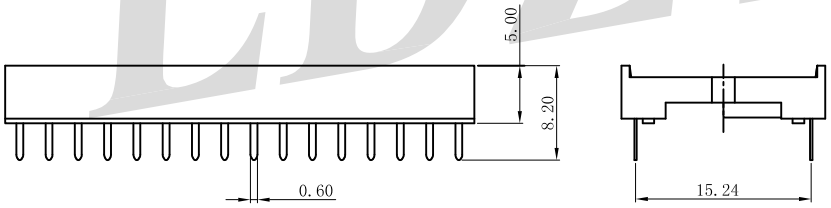


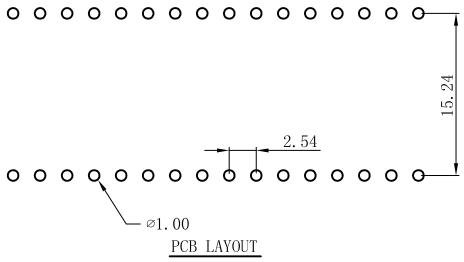



Reference Informations:
*Material:
Terminal: Phosphor Bronze/Tin-plated
Housing: PPS,UL94V-0 Black
Ordering Information & Dimensions

Poles	Dimensions (mm)	
	A	B
2*12	30.48	27.94
2*14	35.56	33.02
2*16	40.64	38.10
2*20	50.80	48.26
2*21	53.34	50.80
2*24	60.96	58.42

B2550WVR-2NP-PSBKT 2.54mm Pitch 180° Dual Row IC Seat

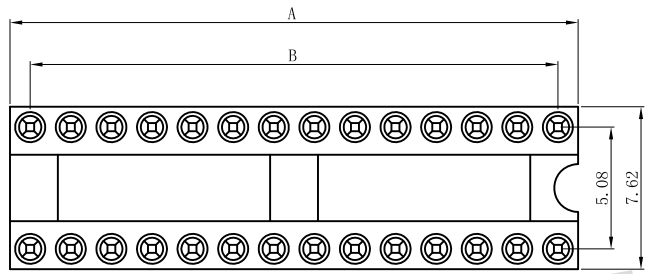

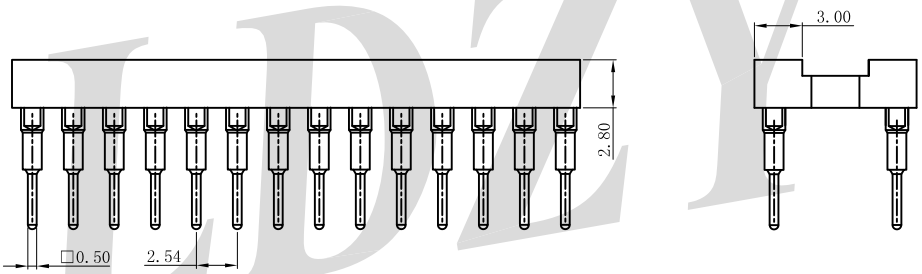




Reference Informations:
*Material:
Terminal: Phosphor Bronze/Tin-plated
Housing: PPS,UL94V-0 Black
Ordering Information & Dimensions

Poles	Dimensions (mm)	
	A	B
2*3	7.62	5.08
2*4	10.16	7.62
2*5	12.70	10.16
2*7	17.78	15.24
2*8	20.32	17.78
2*10	25.40	22.86
2*12	30.48	27.94
2*14	35.56	33.02
2*16	40.64	38.10
2*20	50.80	48.26
2*24	60.96	58.42

LDZY

B2550 Series 2.54mm Pitch Series Board to Board Connectors

B2550WVS-2NP-PSBKT 2.54mm Pitch 180° SMT Dual Row IC Seat

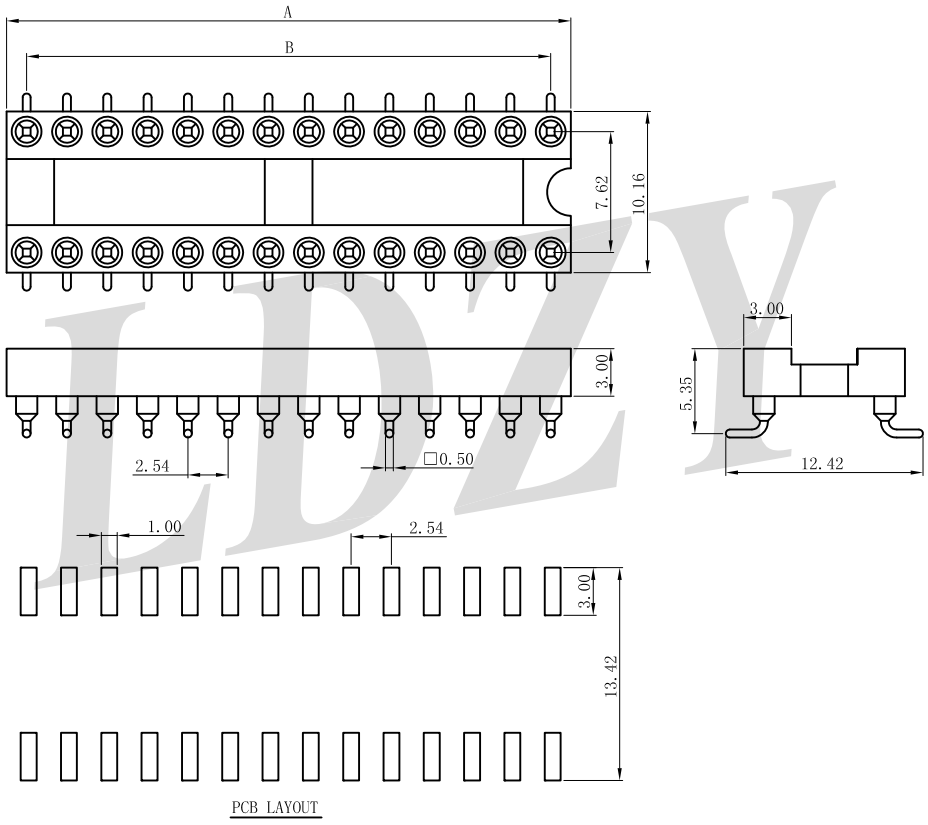

Reference Informations:

*Material:

Terminal: Phosphor Bronze/Tin-plated

Housing: PPS,UL94V-0 Black

Ordering Information & Dimensions

Poles	Dimensions (mm)	
	A	B
2*3	7.62	5.08
2*4	10.16	7.62
2*5	12.70	10.16
2*7	17.78	15.24
2*8	20.32	17.78
2*10	25.40	22.86
2*12	30.48	27.94
2*14	35.56	33.02
2*16	40.64	38.10
2*20	50.80	48.26
2*24	60.96	58.42

LDZY