

C5030Series 5.03mm Pitch Series Wire to Wire Connectors

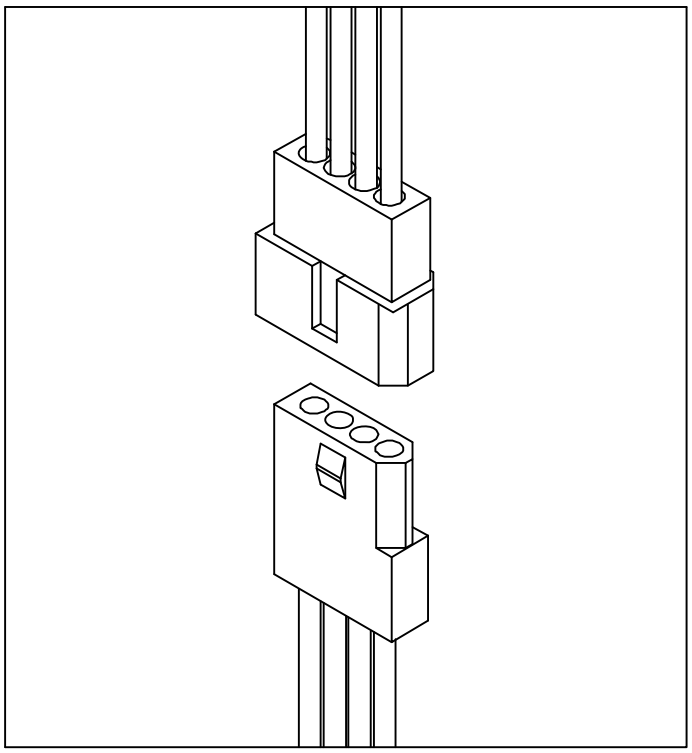


SPECIFICATIONS:


Voltage Rating：250V AC/DC
Current Rating：12A AC/DC
Withstanding Voltage：1500V AC/Minute
Temperature Range：-25°C~+85°C
Insulation Resistance：1000MΩ Min.
Contact Resistance：10mΩ Max.
Applicable Wire Range：AWG#18~24.


Assembly Layout:

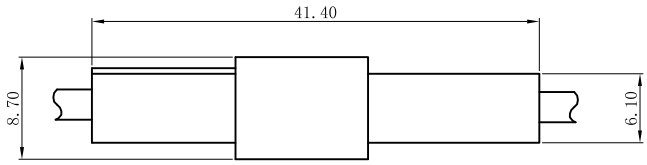

C5030HF-03-XXNA 5.03mm Pitch Single Row Housing

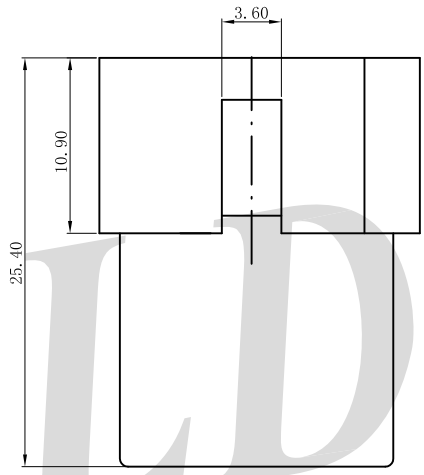

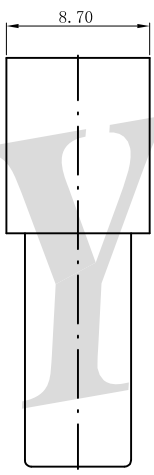




Reference Informations:
*Material:
Housing: PA66 UL94V-0/Natrual
PA66 UL94V-2/Natrual
*Suitable LDZY C5030 series Terminal
*Mates with LDZY C5030 Male Housing

LDZY


C5030 Series 5.03mm Pitch Series Wire to Wire Connectors

C5030HM-03-XXNA 5.03mm Pitch Single Row Housing

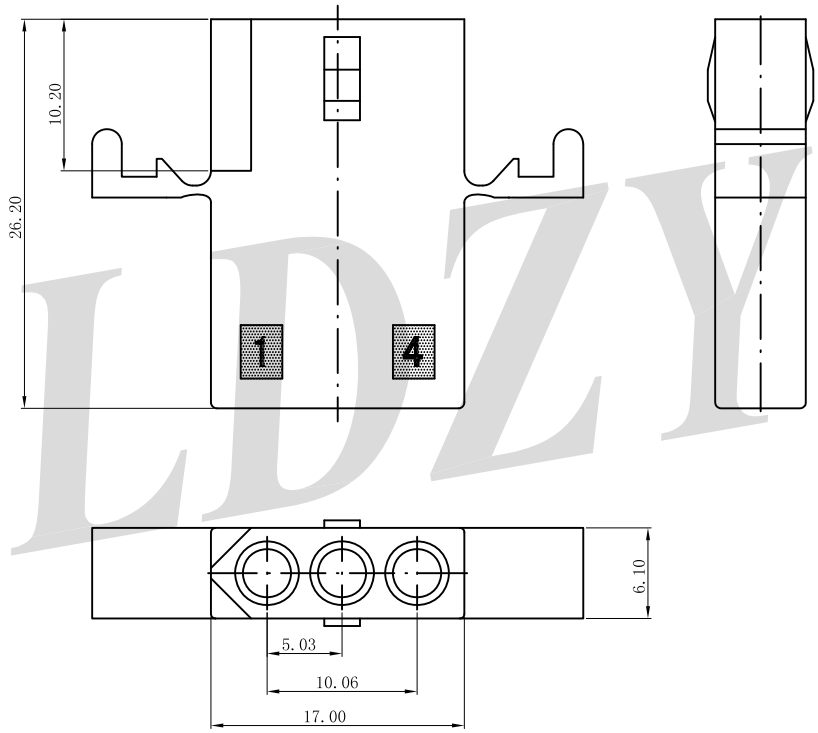

Reference Informations:
*Material:
Housing: PA66 UL94V-0/Natrual
PA66 UL94V-2/Natrual
*Suitable LDZY 5030 series Terminal
*Mates with LDZY C5030 Female Housing

C5030TF-PT1 5.03mm Pitch Terminal

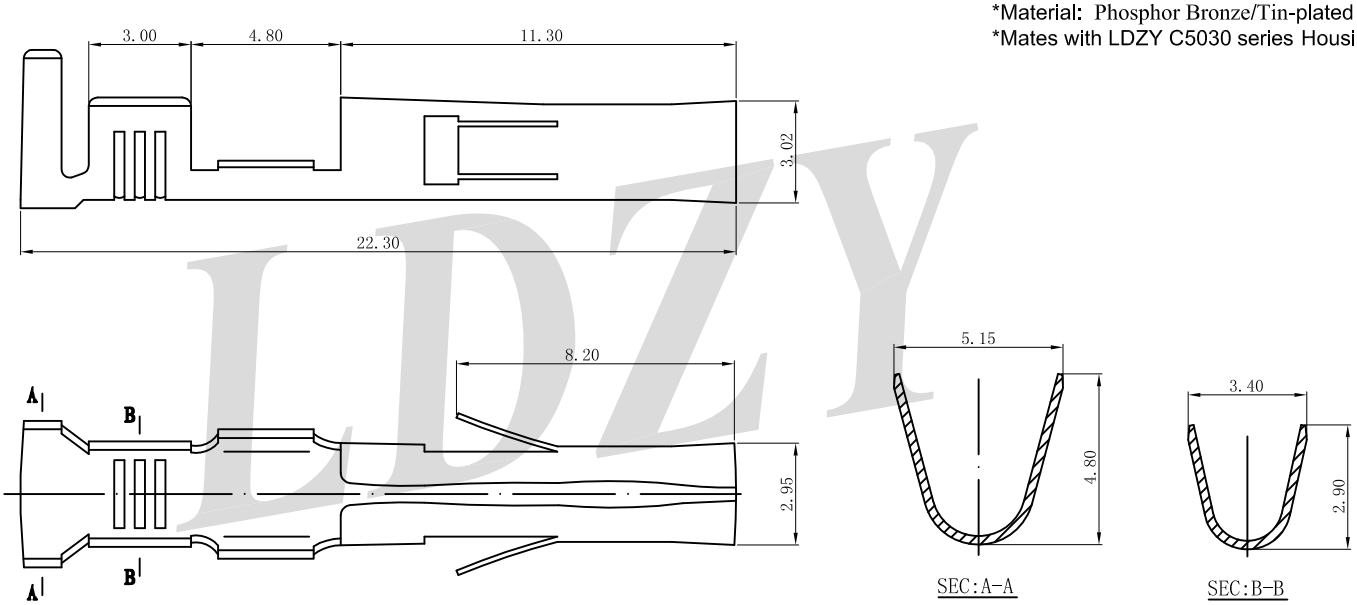

Reference Informations:
*Material: Phosphor Bronze/Tin-plated
*Mates with LDZY C5030 series Housing


Ordering Information & Specifications

Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
C5030TF-PT1	AWG#18-#24	3.00mm(max)	Phosphor Bronze	Tin-plated	4,500pcs

C5030 Series 5.03mm Pitch Series Wire to Wire Connectors

C5030TM-PT1 5.03mm Pitch Terminal

Reference Informations:
*Material: Phosphor Bronze/Tin-plated
*Mates with LDZY C5030 series Housing

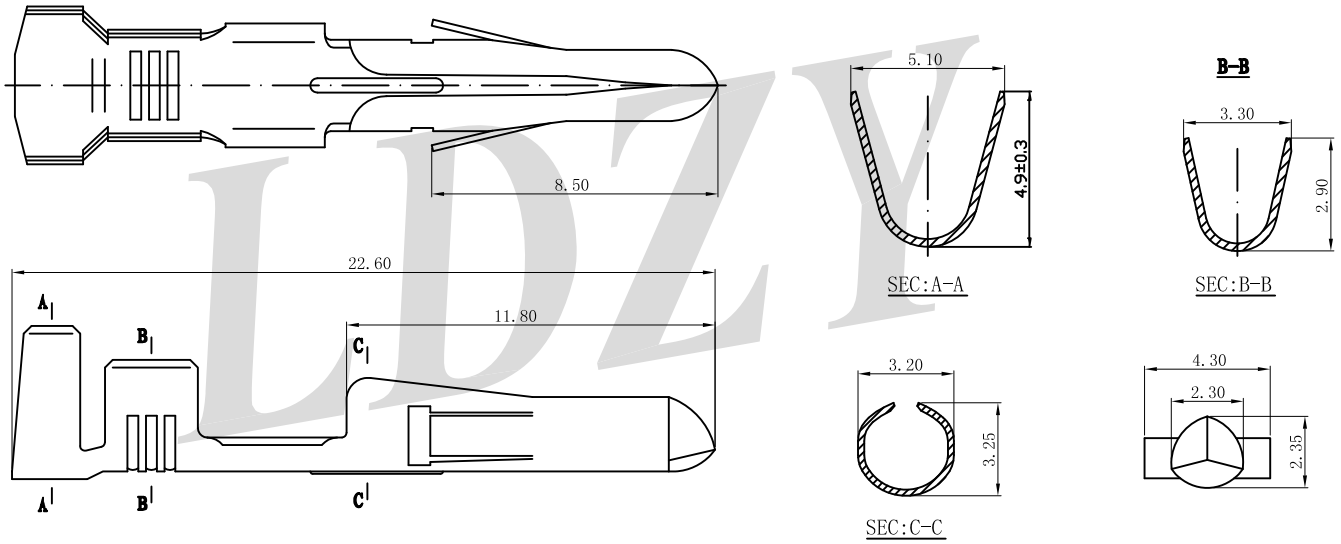

Ordering Information & Specifications

Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
C5030TM-PT1	AWG#18-#24	3.00mm(max)	Phosphor Bronze	Tin-plated	4,500pcs