
LDZY® Electronics

FH127Series 1.27mm Pitch Series Female Header Connectors

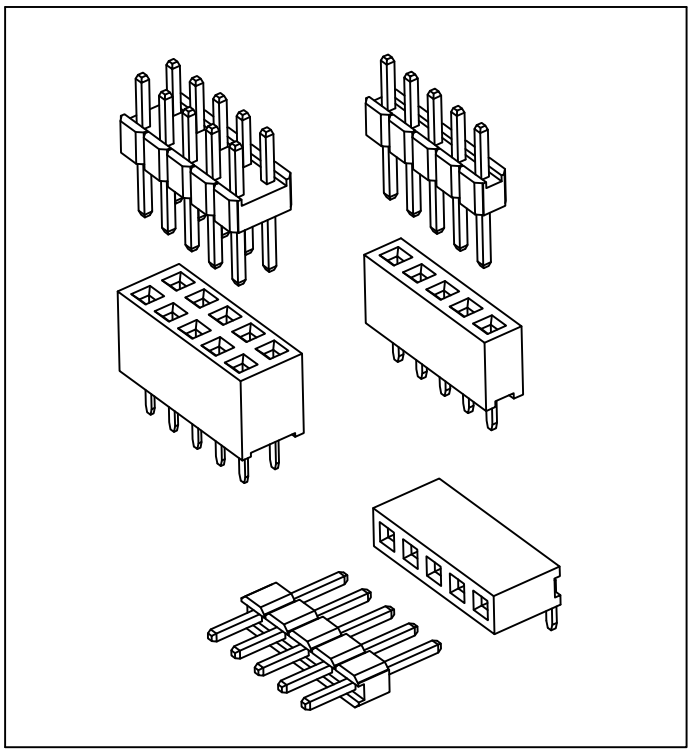


SPECIFICATIONS:

Voltage Rating：250V AC/DC
Current Rating：1A AC/DC
Withstanding Voltage：500V AC/Minute
Temperature Range：-25°C~+85°C
Insulation Resistance：500MΩ Min.
Contact Resistance：20mΩ Max.

Assembly Layout:

FH127VA-2NP-6TBKGXX 1.27mm Pitch 90° Dual Row Female Header

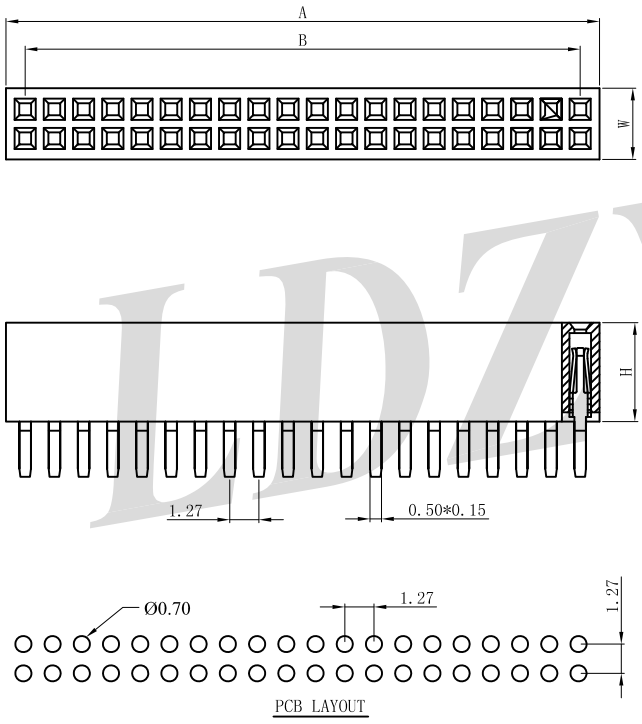

Option	塑高H	塑宽W	锡脚DC
01	4.30	3.10	2.40
02	4.30	3.10	2.70
11	3.40	3.10	2.40


Reference Informations:
*Material:
Conduct: Phosphor Bronze/Gold Flash
Base: PA6T UL94V-0/ Black

Ordering Information & Dimensions

Poles	Dimensions (mm)		Poles	Dimensions (mm)	
	A	B		A	B
2*2P	2.94	1.27	2*27P	34.69	33.02
2*3P	4.21	2.54	2*28P	35.96	34.29
2*4P	5.48	3.81	2*29P	37.23	35.56
2*5P	6.75	5.08	2*30P	38.50	36.83
2*6P	8.02	6.35	2*31P	39.77	38.10
2*7P	9.29	7.62	2*32P	41.04	39.37
2*8P	10.56	8.89	2*33P	42.31	40.64
2*9P	11.83	10.16	2*34P	43.58	41.91
2*10P	13.10	11.43	2*35P	44.85	43.18
2*11P	14.37	12.70	2*36P	46.12	44.45
2*12P	15.64	13.97	2*37P	47.39	45.72
2*13P	16.91	15.24	2*38P	48.66	46.99
2*14P	18.18	16.51	2*39P	49.93	48.26
2*15P	19.45	17.78	2*40P	51.20	49.53
2*16P	20.72	19.05	2*41P	52.47	50.80
2*17P	21.99	20.32	2*42P	53.74	52.07
2*18P	23.26	21.59	2*43P	55.01	53.34
2*19P	24.53	22.86	2*44P	56.28	54.61
2*20P	25.80	24.13	2*45P	57.55	55.88
2*21P	27.07	25.40	2*46P	58.82	57.15
2*22P	28.34	26.67	2*47P	60.09	58.42
2*23P	29.61	27.94	2*48P	61.36	59.69
2*24P	30.88	29.21	2*49P	62.63	60.96
2*25P	32.15	30.48	2*50P	63.90	62.23
2*26P	33.42	31.75			

FH127 Series 1.27mm Pitch Series Female Header Connectors

FH127VA-NP-6TBKGXX 1.27mm Pitch 90° Single Row Female Header

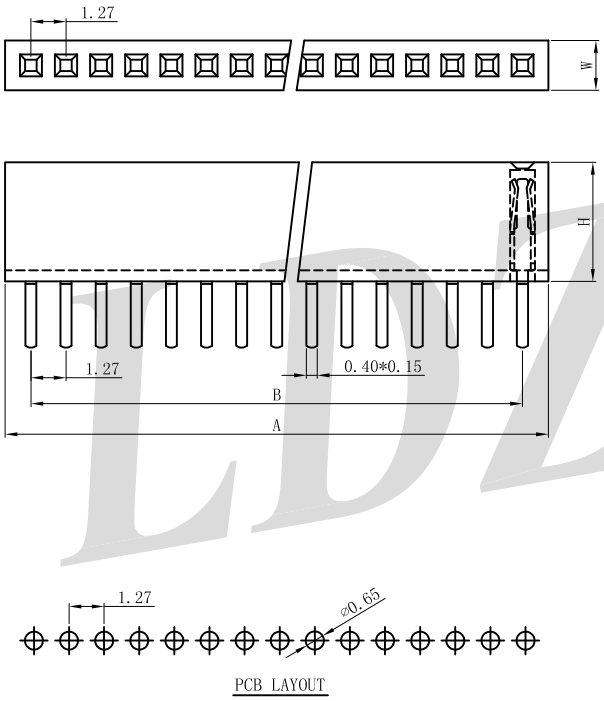



Option	塑高H	塑宽W	锡脚DC
01	4.30	2.10	2.40
02	4.30	2.10	2.70

Reference Informations:
*Material:
Conduct: Phosphor Bronze/Gold Flash
Base: PA6T UL94V-0/ Black
Ordering Information & Dimensions

Poles	Dimensions (mm)		Poles	Dimensions (mm)	
	A	B		A	B
02	3.14	1.27	27	34.89	33.02
03	4.41	2.54	28	36.16	34.29
04	5.68	3.81	29	37.43	35.56
05	6.95	5.08	30	38.70	36.83
06	8.22	6.35	31	39.97	38.10
07	9.49	7.62	32	41.24	39.37
08	10.76	8.89	33	42.51	40.64
09	12.03	10.16	34	43.78	41.91
10	13.30	11.43	35	45.05	43.18
11	14.57	12.70	36	46.32	44.45
12	15.84	13.97	37	47.59	45.72
13	17.11	15.24	38	48.86	46.99
14	18.38	16.51	39	50.13	48.26
15	19.65	17.78	40	51.40	49.53
16	20.92	19.05	41	52.67	50.80
17	22.19	20.32	42	53.94	52.07
18	23.46	21.59	43	55.21	53.34
19	24.73	22.86	44	56.48	54.61
20	26.00	24.13	45	57.75	55.88
21	27.27	25.40	46	59.02	57.15
22	28.54	26.67	47	60.29	58.42
23	29.81	27.94	48	61.56	59.69
24	31.08	29.21	49	62.83	60.96
25	32.35	30.48	50	64.10	62.23
26	33.62	31.75			

FH127VAS-2NP-6TBKGXX 1.27mm Pitch 180° Dual Row Female Header

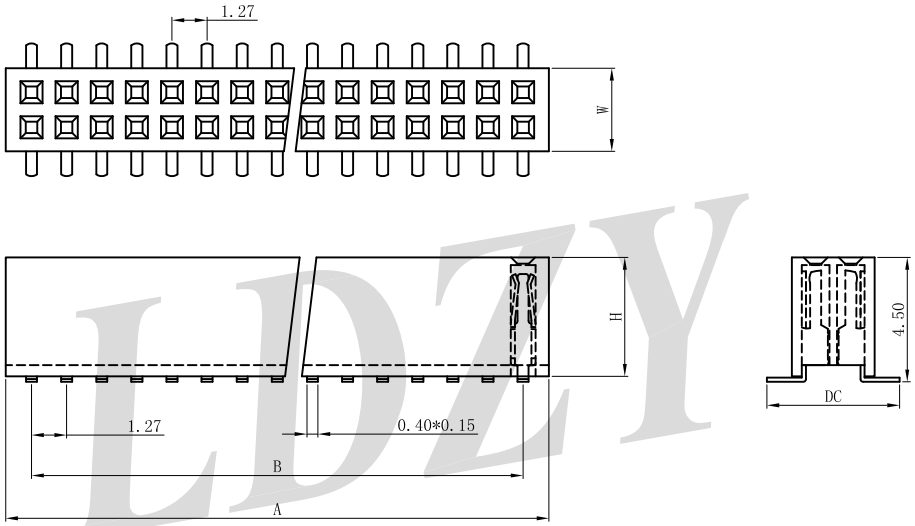

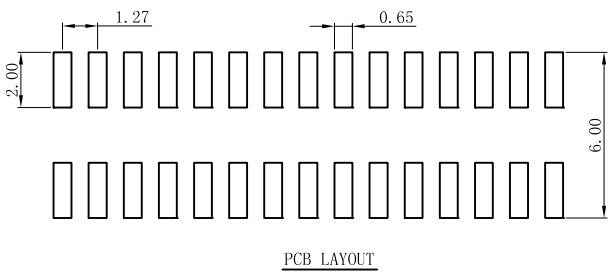

Option	塑高H	塑宽W	锡脚DC
01	4.30	3.00	4.80


Reference Informations:
*Material:
Conduct: Phosphor Bronze/Gold Flash
Base: PA6T UL94V-0/ Black
Ordering Information & Dimensions

Poles	Dimensions (mm)		Poles	Dimensions (mm)	
	A	B		A	B
2*2P	3.14	1.27	2*27P	34.89	33.02
2*3P	4.41	2.54	2*28P	36.16	34.29
2*4P	5.68	3.81	2*29P	37.43	35.56
2*5P	6.95	5.08	2*30P	38.70	36.83
2*6P	8.22	6.35	2*31P	39.97	38.10
2*7P	9.49	7.62	2*32P	41.24	39.37
2*8P	10.76	8.89	2*33P	42.51	40.64
2*9P	12.03	10.16	2*34P	43.78	41.91
2*10P	13.30	11.43	2*35P	45.05	43.18
2*11P	14.57	12.70	2*36P	46.32	44.45
2*12P	15.84	13.97	2*37P	47.59	45.72
2*13P	17.11	15.24	2*38P	48.86	46.99
2*14P	18.38	16.51	2*39P	50.13	48.26
2*15P	19.65	17.78	2*40P	51.40	49.53
2*16P	20.92	19.05	2*41P	52.67	50.80
2*17P	22.19	20.32	2*42P	53.94	52.07
2*18P	23.46	21.59	2*43P	55.21	53.34
2*19P	24.73	22.86	2*44P	56.48	54.61
2*20P	26.00	24.13	2*45P	57.75	55.88
2*21P	27.27	25.40	2*46P	59.02	57.15
2*22P	28.54	26.67	2*47P	60.29	58.42
2*23P	29.81	27.94	2*48P	61.56	59.69
2*24P	31.08	29.21	2*49P	62.83	60.96
2*25P	32.35	30.48	2*50P	64.10	62.23
2*26P	33.62	31.75			

LDZY

FH127 Series 1.27mm Pitch Series Female Header Connectors

FH127VAS-NP-6TBKGXX 1.27mm Pitch 180° Single Row Female Header

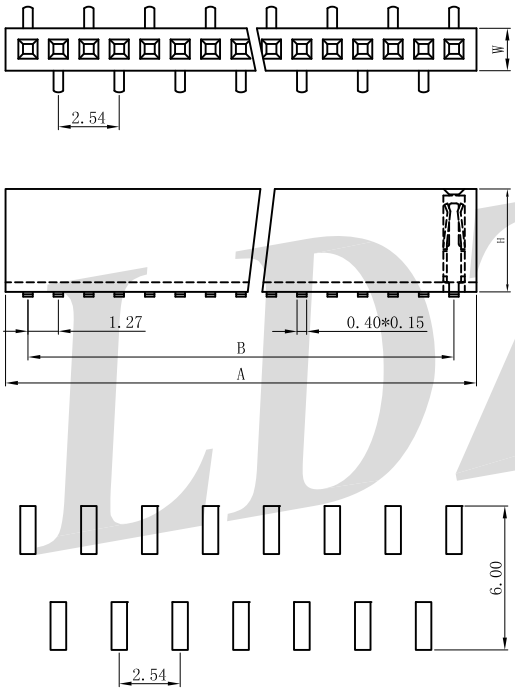


PCB LAYOUT

Option	塑高H	塑宽W	锡脚DC
01	2.00	1.80	3.10
11	4.30	2.10	3.10
21	5.70	2.50	3.80


Reference Informations:
*Material:
Conduct: Phosphor Bronze/Gold Flash
Base: PA6T UL94V-0/ Black
Ordering Information & Dimensions

Poles	Dimensions (mm)		Poles	Dimensions (mm)	
	A	B		A	B
02	3.14	1.27	27	34.89	33.02
03	4.41	2.54	28	36.16	34.29
04	5.68	3.81	29	37.43	35.56
05	6.95	5.08	30	38.70	36.83
06	8.22	6.35	31	39.97	38.10
07	9.49	7.62	32	41.24	39.37
08	10.76	8.89	33	42.51	40.64
09	12.03	10.16	34	43.78	41.91
10	13.30	11.43	35	45.05	43.18
11	14.57	12.70	36	46.32	44.45
12	15.84	13.97	37	47.59	45.72
13	17.11	15.24	38	48.86	46.99
14	18.38	16.51	39	50.13	48.26
15	19.65	17.78	40	51.40	49.53
16	20.92	19.05	41	52.67	50.80
17	22.19	20.32	42	53.94	52.07
18	23.46	21.59	43	55.21	53.34
19	24.73	22.86	44	56.48	54.61
20	26.00	24.13	45	57.75	55.88
21	27.27	25.40	46	59.02	57.15
22	28.54	26.67	47	60.29	58.42
23	29.81	27.94	48	61.56	59.69
24	31.08	29.21	49	62.83	60.96
25	32.35	30.48	50	64.10	62.23
26	33.62	31.75			


FH127VXS-2NP-6TBKGXX 1.27mm Pitch 180° Dual Row Female Header

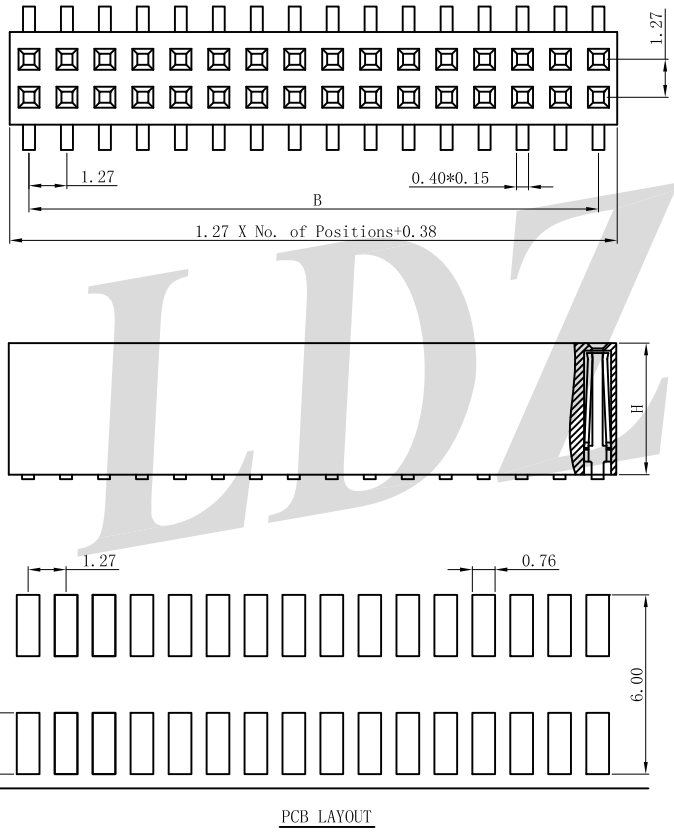

PCB LAYOUT



FH127VFS-2NP-6TBKGXX



FH127VS-2NP-6TBKGXX

Option	塑高H	塑宽W	锡脚DC
01	4.40	3.10	4.80
02	3.40	3.10	4.80
03	2.10	3.10	4.40

Reference Informations:
*Material:
Conduct: Phosphor Bronze/Gold Flash
Base: PA6T UL94V-0/ Black
Ordering Information & Dimensions

Poles	Dimensions (mm)		Poles	Dimensions (mm)	
	A	B		A	B
2*2P	2.94	1.27	2*27P	34.69	33.02
2*3P	4.21	2.54	2*28P	35.96	34.29
2*4P	5.48	3.81	2*29P	37.23	35.56
2*5P	6.75	5.08	2*30P	38.50	36.83
2*6P	8.02	6.35	2*31P	39.77	38.10
2*7P	9.29	7.62	2*32P	41.04	39.37
2*8P	10.56	8.89	2*33P	42.31	40.64
2*9P	11.83	10.16	2*34P	43.58	41.91
2*10P	13.10	11.43	2*35P	44.85	43.18
2*11P	14.37	12.70	2*36P	46.12	44.45
2*12P	15.64	13.97	2*37P	47.39	45.72
2*13P	16.91	15.24	2*38P	48.66	46.99
2*14P	18.18	16.51	2*39P	49.93	48.26
2*15P	19.45	17.78	2*40P	51.20	49.53
2*16P	20.72	19.05	2*41P	52.47	50.80
2*17P	21.99	20.32	2*42P	53.74	52.07
2*18P	23.26	21.59	2*43P	55.01	53.34
2*19P	24.53	22.86	2*44P	56.28	54.61
2*20P	25.80	24.13	2*45P	57.55	55.88
2*21P	27.07	25.40	2*46P	58.82	57.15
2*22P	28.34	26.67	2*47P	60.09	58.42
2*23P	29.61	27.94	2*48P	61.36	59.69
2*24P	30.88	29.21	2*49P	62.63	60.96
2*25P	32.15	30.48	2*50P	63.90	62.23
2*26P	33.42	31.75			