
FH200Series 2.00mm Pitch Series Female Header Connectors

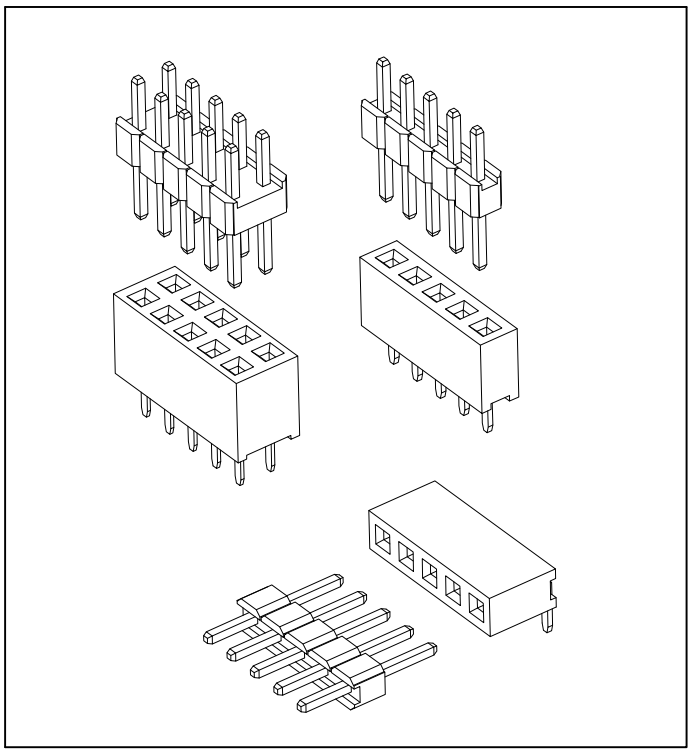



SPECIFICATIONS:

Voltage Rating：250V AC/DC
Current Rating：2A AC/DC
Withstanding Voltage：1000V AC/Minute
Temperature Range：-25°C~+85°C
Insulation Resistance：1000MΩ Min.
Contact Resistance：20mΩ Max.

Assembly Layout:

FH200R-2NP-POBKGXXX 2.00mm Pitch 90° Dual Row Female Header

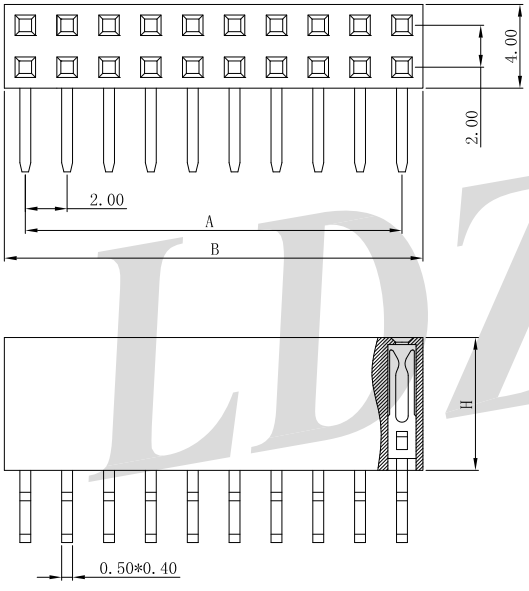




Reference Informations:
*Material:
Conduct: Brass/Gold Flash
Base: PBT UL94V-0/ Black

Ordering Information & Dimensions

Poles	Dimensions (mm)		Poles	Dimensions (mm)	
	A	B		A	B
2*2P	2.00	4.30	2*22P	42.00	44.30
2*3P	4.00	6.30	2*23P	44.00	46.30
2*4P	6.00	8.30	2*24P	46.00	48.30
2*5P	8.00	10.30	2*25P	48.00	50.30
2*6P	10.00	12.30	2*26P	50.00	52.30
2*7P	12.00	14.30	2*27P	52.00	54.30
2*8P	14.00	16.30	2*28P	54.00	56.30
2*9P	16.00	18.30	2*29P	56.00	58.30
2*10P	18.00	20.30	2*30P	58.00	60.30
2*11P	20.00	22.30	2*31P	60.00	62.30
2*12P	22.00	24.30	2*32P	62.00	64.30
2*13P	24.00	26.30	2*33P	64.00	66.30
2*14P	26.00	28.30	2*34P	66.00	68.30
2*15P	28.00	30.30	2*35P	68.00	70.30
2*16P	30.00	32.30	2*36P	70.00	72.30
2*17P	32.00	34.30	2*37P	72.00	74.30
2*18P	34.00	36.30	2*38P	74.00	76.30
2*19P	36.00	38.30	2*39P	76.00	78.30
2*20P	38.00	40.30	2*40P	78.00	80.30
2*21P	40.00	42.30			

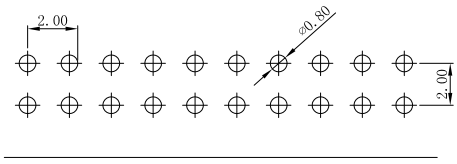


PCB LAYOUT

Option	塑高H	塑宽W	Other	锡脚DC
01	6.35	4.00	Blank	3.20
			A	2.30

LDZY

FH200 Series 2.00mm Pitch Series Female Header Connectors


FH200RA-2NP-6TBKG03 2.00mm Pitch 90° Dual Row Female Header

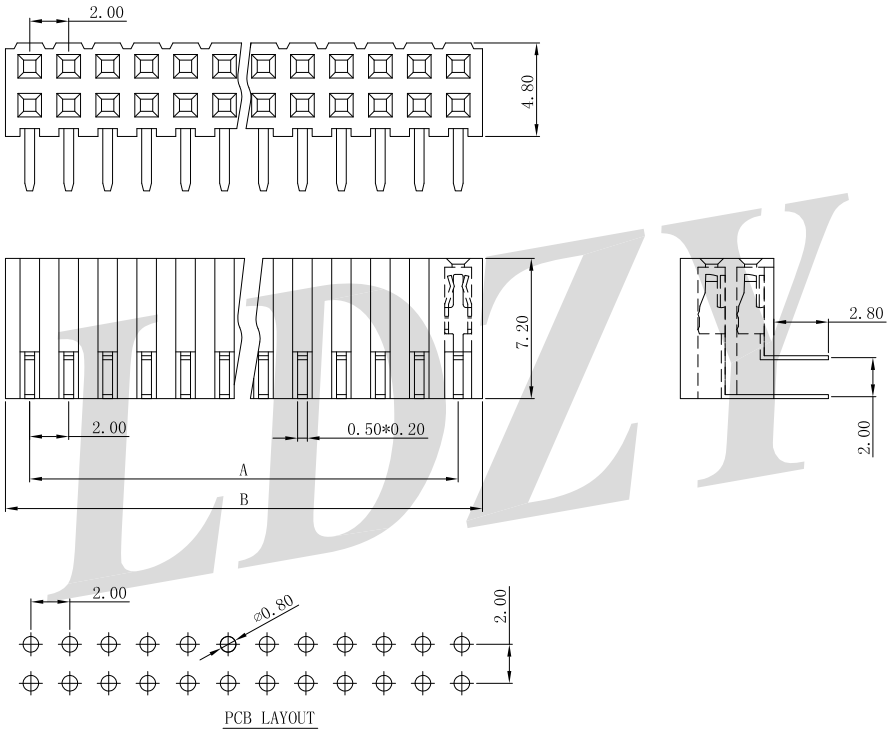

Reference Informations:
*Material:
Conduct: Phosphor Bronze/Gold Flash
Base: PA6T UL94V-0/ Black
Ordering Information & Dimensions

Poles	Dimensions (mm)		Poles	Dimensions (mm)	
	A	B		A	B
2*2P	2.00	4.50	2*22P	42.00	44.50
2*3P	4.00	6.50	2*23P	44.00	46.50
2*4P	6.00	8.50	2*24P	46.00	48.50
2*5P	8.00	10.50	2*25P	48.00	50.50
2*6P	10.00	12.50	2*26P	50.00	52.50
2*7P	12.00	14.50	2*27P	52.00	54.50
2*8P	14.00	16.50	2*28P	54.00	56.50
2*9P	16.00	18.50	2*29P	56.00	58.50
2*10P	18.00	20.50	2*30P	58.00	60.50
2*11P	20.00	22.50	2*31P	60.00	62.50
2*12P	22.00	24.50	2*32P	62.00	64.50
2*13P	24.00	26.50	2*33P	64.00	66.50
2*14P	26.00	28.50	2*34P	66.00	68.50
2*15P	28.00	30.50	2*35P	68.00	70.50
2*16P	30.00	32.50	2*36P	70.00	72.50
2*17P	32.00	34.50	2*37P	72.00	74.50
2*18P	34.00	36.50	2*38P	74.00	76.50
2*19P	36.00	38.50	2*39P	76.00	78.50
2*20P	38.00	40.50	2*40P	78.00	80.50
2*21P	40.00	42.50			

FH200RA-NP-POBKGXXX 2.00mm Pitch 90° Single Row Female Header

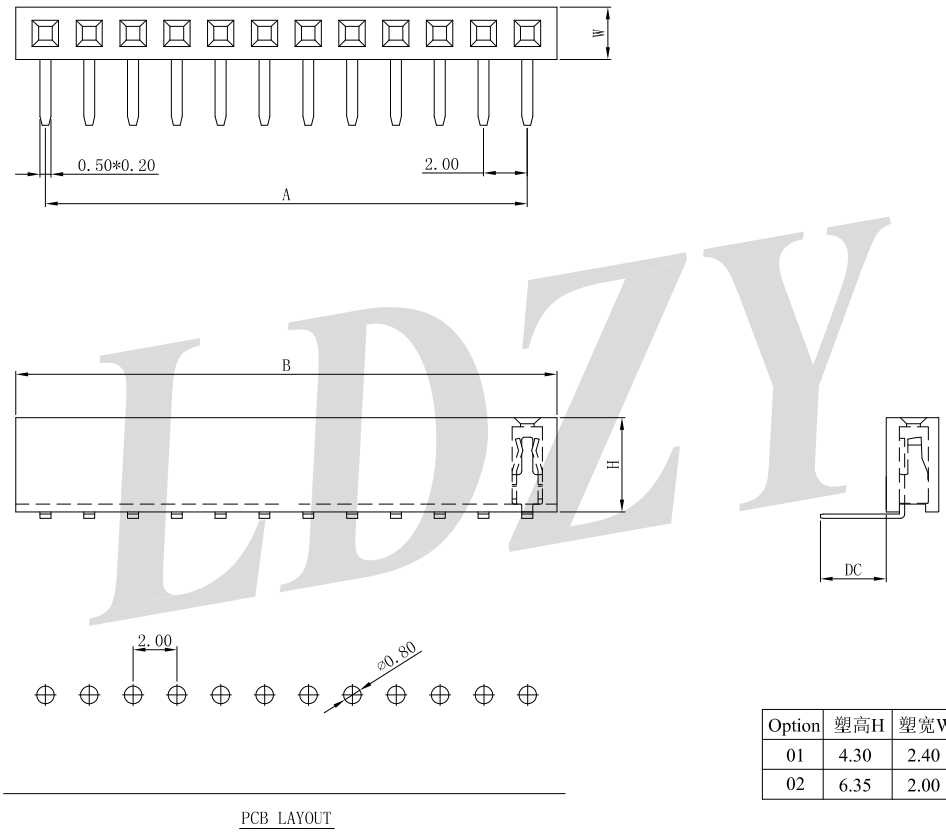

Reference Informations:
*Material:
Conduct: Phosphor Bronze/Gold Flash
Base: PBT UL94V-0/ Black
Ordering Information & Dimensions


Poles	Dimensions (mm)		Poles	Dimensions (mm)	
	A	B		A	B
02	2.00	4.70	22	42.00	44.70
03	4.00	6.70	23	44.00	46.70
04	6.00	8.70	24	46.00	48.70
05	8.00	10.70	25	48.00	50.70
06	10.00	12.70	26	50.00	52.70
07	12.00	14.70	27	52.00	54.70
08	14.00	16.70	28	54.00	56.70
09	16.00	18.70	29	56.00	58.70
10	18.00	20.70	30	58.00	60.70
11	20.00	22.70	31	60.00	62.70
12	22.00	24.70	32	62.00	64.70
13	24.00	26.70	33	64.00	66.70
14	26.00	28.70	34	66.00	68.70
15	28.00	30.70	35	68.00	70.70
16	30.00	32.70	36	70.00	72.70
17	32.00	34.70	37	72.00	74.70
18	34.00	36.70	38	74.00	76.70
19	36.00	38.70	39	76.00	78.70
20	38.00	40.70	40	78.00	80.70
21	40.00	42.70			

Option	塑高H	塑宽W	Other	锡脚DC
01	4.30	2.40	Blank	2.10
02	6.35	2.00	A	3.20

LDZY Electronics

FH200 Series 2.00mm Pitch Series Female Header Connectors


FH200RS-NP-6TBKG01 2.00mm Pitch 90° Single Row Female Header

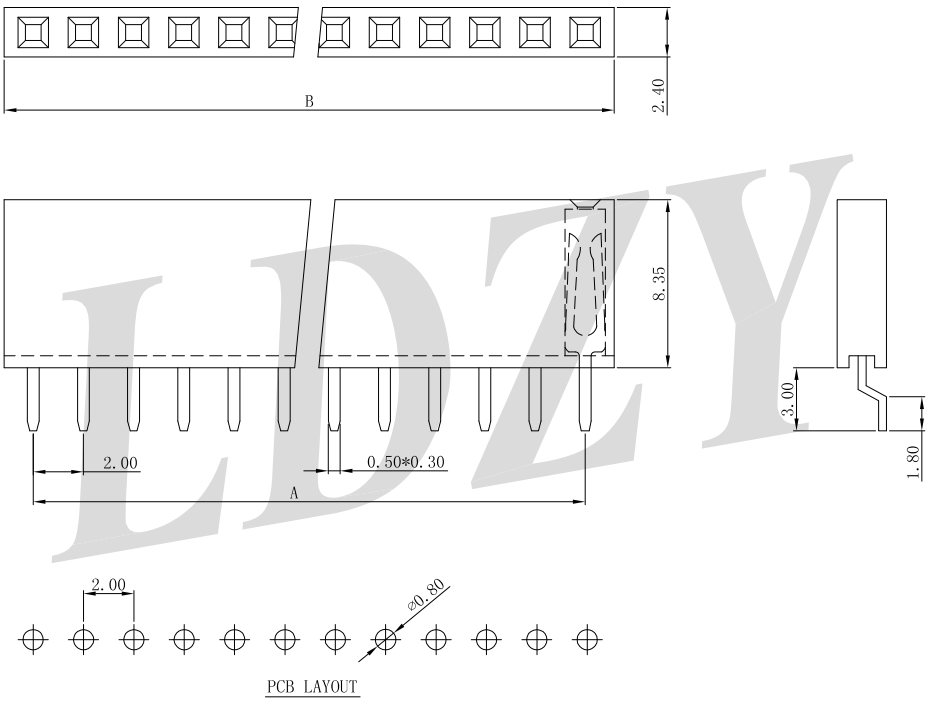


Reference Informations:
*Material:
Conduct: Brass/Gold Flash
Base: PA6T UL94V-0/ Black
Ordering Information & Dimensions

Poles	Dimensions (mm)		Poles	Dimensions (mm)	
	A	B		A	B
02	2.00	4.30	22	42.00	44.30
03	4.00	6.30	23	44.00	46.30
04	6.00	8.30	24	46.00	48.30
05	8.00	10.30	25	48.00	50.30
06	10.00	12.30	26	50.00	52.30
07	12.00	14.30	27	52.00	54.30
08	14.00	16.30	28	54.00	56.30
09	16.00	18.30	29	56.00	58.30
10	18.00	20.30	30	58.00	60.30
11	20.00	22.30	31	60.00	62.30
12	22.00	24.30	32	62.00	64.30
13	24.00	26.30	33	64.00	66.30
14	26.00	28.30	34	66.00	68.30
15	28.00	30.30	35	68.00	70.30
16	30.00	32.30	36	70.00	72.30
17	32.00	34.30	37	72.00	74.30
18	34.00	36.30	38	74.00	76.30
19	36.00	38.30	39	76.00	78.30
20	38.00	40.30	40	78.00	80.30
21	40.00	42.30			

FH200V-NP-POBKG01 2.00mm Pitch 180° Single Row Female Header

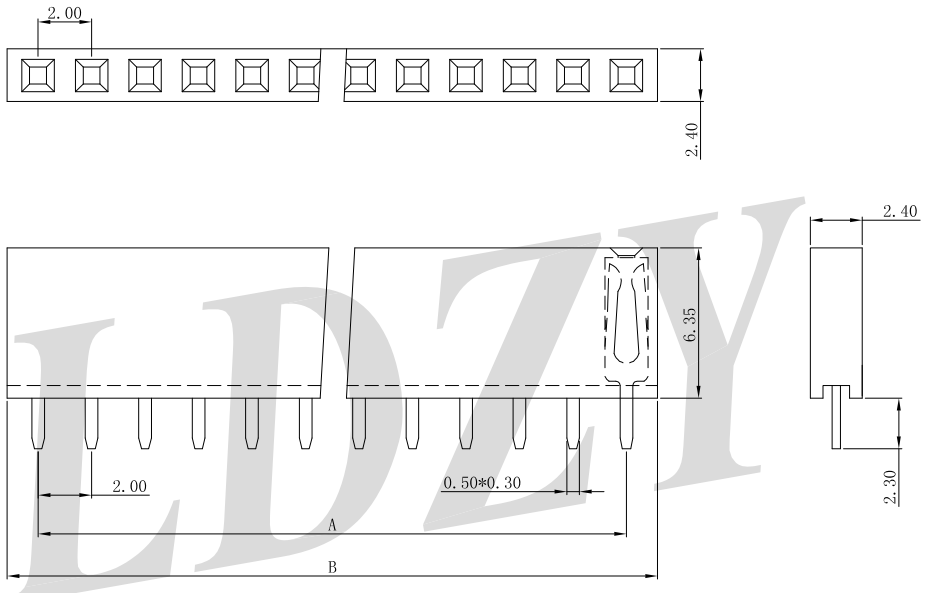

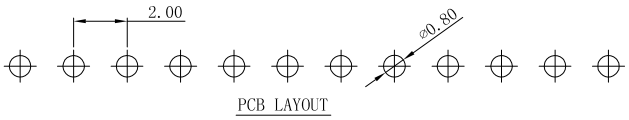


Reference Informations:
*Material:
Conduct: Phosphor Bronze/Gold Flash
Base: PBT UL94V-0/ Black
Ordering Information & Dimensions

Poles	Dimensions (mm)		Poles	Dimensions (mm)	
	A	B		A	B
02	2.00	4.30	22	42.00	44.30
03	4.00	6.30	23	44.00	46.30
04	6.00	8.30	24	46.00	48.30
05	8.00	10.30	25	48.00	50.30
06	10.00	12.30	26	50.00	52.30
07	12.00	14.30	27	52.00	54.30
08	14.00	16.30	28	54.00	56.30
09	16.00	18.30	29	56.00	58.30
10	18.00	20.30	30	58.00	60.30
11	20.00	22.30	31	60.00	62.30
12	22.00	24.30	32	62.00	64.30
13	24.00	26.30	33	64.00	66.30
14	26.00	28.30	34	66.00	68.30
15	28.00	30.30	35	68.00	70.30
16	30.00	32.30	36	70.00	72.30
17	32.00	34.30	37	72.00	74.30
18	34.00	36.30	38	74.00	76.30
19	36.00	38.30	39	76.00	78.30
20	38.00	40.30	40	78.00	80.30
21	40.00	42.30			

LDZY

FH200 Series 2.00mm Pitch Series Female Header Connectors

FH200VA-2NP-POBKGXXX 2.00mm Pitch 180° Dual Row Female Header

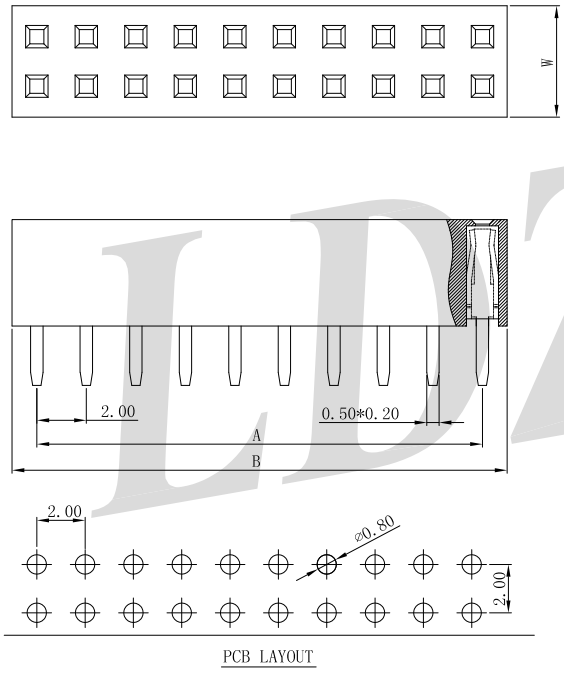


PCB LAYOUT


Option	塑高H	塑宽W	Other	锡脚DC
01	4.30	4.00	Blank	2.40
02	6.35	4.00	A	2.80
03	4.30	4.50		

Reference Informations:
*Material:
Conduct: Brass/Gold Flash
Base: PBT UL94V-0/ Black
Ordering Information & Dimensions

Poles	Dimensions (mm)		Poles	Dimensions (mm)	
	A	B		A	B
2*2P	2.00	4.50	2*22P	42.00	44.50
2*3P	4.00	6.50	2*23P	44.00	46.50
2*4P	6.00	8.50	2*24P	46.00	48.50
2*5P	8.00	10.50	2*25P	48.00	50.50
2*6P	10.00	12.50	2*26P	50.00	52.50
2*7P	12.00	14.50	2*27P	52.00	54.50
2*8P	14.00	16.50	2*28P	54.00	56.50
2*9P	16.00	18.50	2*29P	56.00	58.50
2*10P	18.00	20.50	2*30P	58.00	60.50
2*11P	20.00	22.50	2*31P	60.00	62.50
2*12P	22.00	24.50	2*32P	62.00	64.50
2*13P	24.00	26.50	2*33P	64.00	66.50
2*14P	26.00	28.50	2*34P	66.00	68.50
2*15P	28.00	30.50	2*35P	68.00	70.50
2*16P	30.00	32.50	2*36P	70.00	72.50
2*17P	32.00	34.50	2*37P	72.00	74.50
2*18P	34.00	36.50	2*38P	74.00	76.50
2*19P	36.00	38.50	2*39P	76.00	78.50
2*20P	38.00	40.50	2*40P	78.00	80.50
2*21P	40.00	42.50			

FH200VA-NP-POBKGXXX 2.00mm Pitch 180° Single Row Female Header

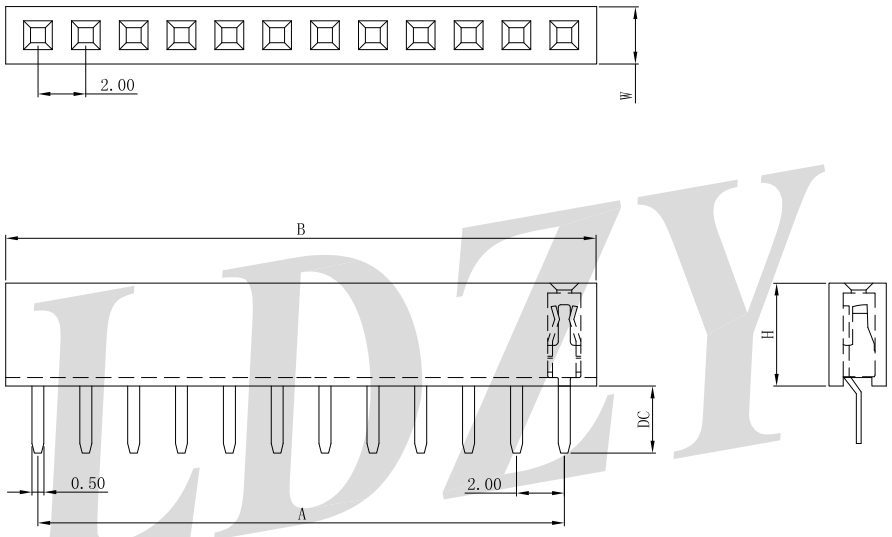



PCB LAYOUT

Option	塑高H	塑宽W	Other	锡脚DC
01	4.30	2.40	Blank	2.80
02	8.50	2.40	A	2.40


Reference Informations:
*Material:
Conduct: Phosphor Bronze/Gold Flash
Base: PBT UL94V-0/ Black
Ordering Information & Dimensions

Poles	Dimensions (mm)		Poles	Dimensions (mm)	
	A	B		A	B
02	2.00	4.70	22	42.00	44.70
03	4.00	6.70	23	44.00	46.70
04	6.00	8.70	24	46.00	48.70
05	8.00	10.70	25	48.00	50.70
06	10.00	12.70	26	50.00	52.70
07	12.00	14.70	27	52.00	54.70
08	14.00	16.70	28	54.00	56.70
09	16.00	18.70	29	56.00	58.70
10	18.00	20.70	30	58.00	60.70
11	20.00	22.70	31	60.00	62.70
12	22.00	24.70	32	62.00	64.70
13	24.00	26.70	33	64.00	66.70
14	26.00	28.70	34	66.00	68.70
15	28.00	30.70	35	68.00	70.70
16	30.00	32.70	36	70.00	72.70
17	32.00	34.70	37	72.00	74.70
18	34.00	36.70	38	74.00	76.70
19	36.00	38.70	39	76.00	78.70
20	38.00	40.70	40	78.00	80.70
21	40.00	42.70			

LDZY

FH200 Series 2.00mm Pitch Series Female Header Connectors

FH200VB-2NP-6TBKGXXX 2.00mm Pitch 180° Dual Row Female Header

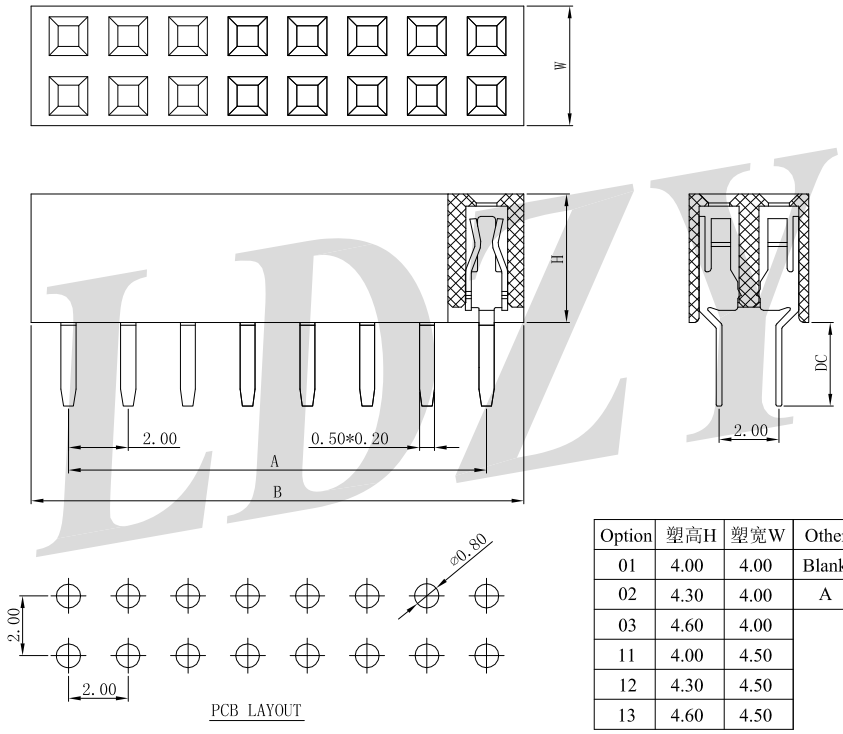



Option	塑高H	塑宽W	Other	锡脚DC
01	4.00	4.00	Blank	2.40
02	4.30	4.00	A	2.80
03	4.60	4.00		
11	4.00	4.50		
12	4.30	4.50		
13	4.60	4.50		

Reference Informations:
*Material:
Conduct: Phosphor Bronze/Gold Flash
Base: PA6T UL94V-0/ Black
Ordering Information & Dimensions

Poles	Dimensions (mm)		Poles	Dimensions (mm)	
	A	B		A	B
2*2P	2.00	4.50	2*22P	42.00	44.50
2*3P	4.00	6.50	2*23P	44.00	46.50
2*4P	6.00	8.50	2*24P	46.00	48.50
2*5P	8.00	10.50	2*25P	48.00	50.50
2*6P	10.00	12.50	2*26P	50.00	52.50
2*7P	12.00	14.50	2*27P	52.00	54.50
2*8P	14.00	16.50	2*28P	54.00	56.50
2*9P	16.00	18.50	2*29P	56.00	58.50
2*10P	18.00	20.50	2*30P	58.00	60.50
2*11P	20.00	22.50	2*31P	60.00	62.50
2*12P	22.00	24.50	2*32P	62.00	64.50
2*13P	24.00	26.50	2*33P	64.00	66.50
2*14P	26.00	28.50	2*34P	66.00	68.50
2*15P	28.00	30.50	2*35P	68.00	70.50
2*16P	30.00	32.50	2*36P	70.00	72.50
2*17P	32.00	34.50	2*37P	72.00	74.50
2*18P	34.00	36.50	2*38P	74.00	76.50
2*19P	36.00	38.50	2*39P	76.00	78.50
2*20P	38.00	40.50	2*40P	78.00	80.50
2*21P	40.00	42.50			

FH200VAS-NP-6TBKGXX 2.00mm Pitch 180° Dual Row Female Header

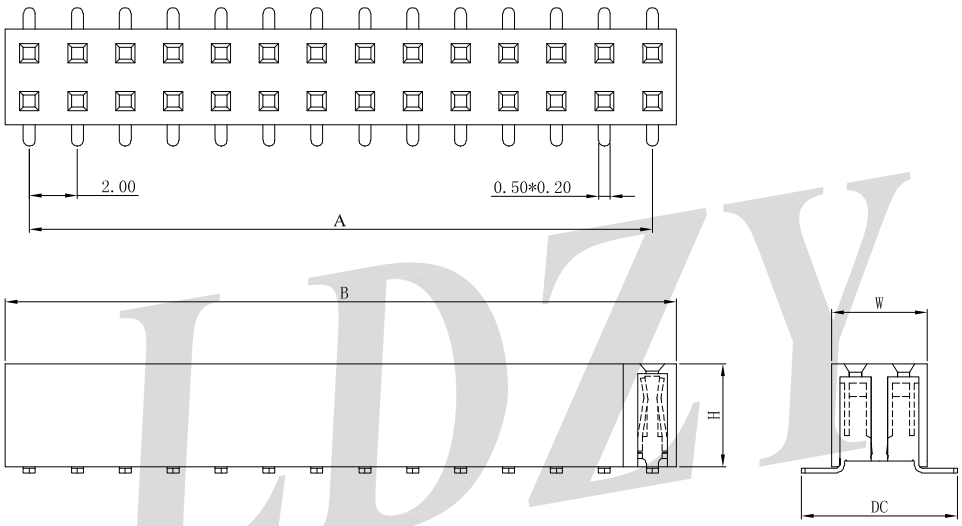

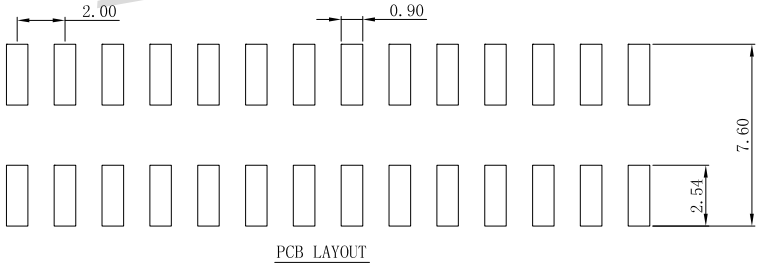

Option	塑高H	塑宽W	锡脚DC
01	4.30	4.00	6.50
03	4.60	4.00	6.20

Reference Informations:
*Material:
Conduct: Phosphor Bronze/Gold Flash
Base: PA6T UL94V-0/ Black
Ordering Information & Dimensions

Poles	Dimensions (mm)		Poles	Dimensions (mm)	
	A	B		A	B
2*2P	2.00	4.30	2*22P	42.00	44.30
2*3P	4.00	6.30	2*23P	44.00	46.30
2*4P	6.00	8.30	2*24P	46.00	48.30
2*5P	8.00	10.30	2*25P	48.00	50.30
2*6P	10.00	12.30	2*26P	50.00	52.30
2*7P	12.00	14.30	2*27P	52.00	54.30
2*8P	14.00	16.30	2*28P	54.00	56.30
2*9P	16.00	18.30	2*29P	56.00	58.30
2*10P	18.00	20.30	2*30P	58.00	60.30
2*11P	20.00	22.30	2*31P	60.00	62.30
2*12P	22.00	24.30	2*32P	62.00	64.30
2*13P	24.00	26.30	2*33P	64.00	66.30
2*14P	26.00	28.30	2*34P	66.00	68.30
2*15P	28.00	30.30	2*35P	68.00	70.30
2*16P	30.00	32.30	2*36P	70.00	72.30
2*17P	32.00	34.30	2*37P	72.00	74.30
2*18P	34.00	36.30	2*38P	74.00	76.30
2*19P	36.00	38.30	2*39P	76.00	78.30
2*20P	38.00	40.30	2*40P	78.00	80.30
2*21P	40.00	42.30			