
PH127Series 1.27mm Pitch Series Pin Header Connectors

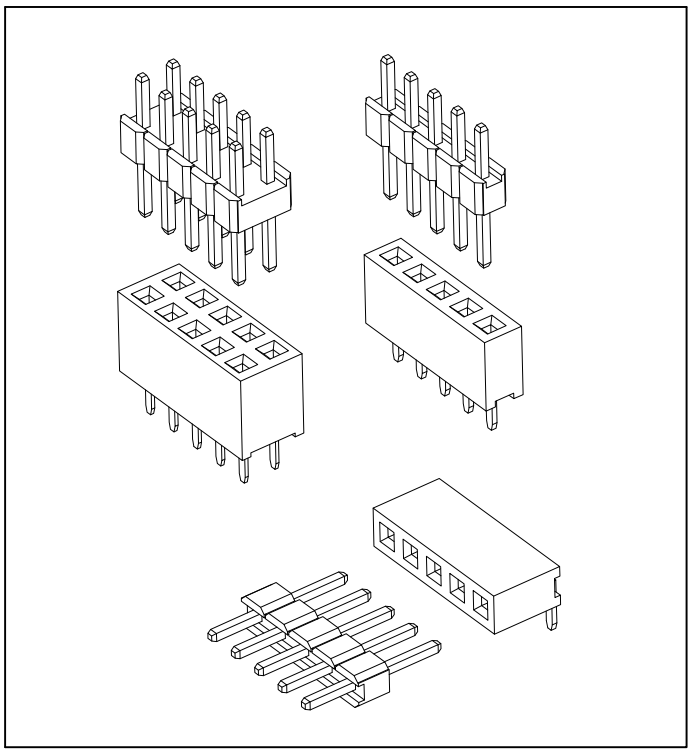



SPECIFICATIONS:


Voltage Rating：250V AC/DC
Current Rating：1A AC/DC
Withstanding Voltage：500V AC/Minute
Temperature Range：-25°C~+85°C
Insulation Resistance：500MΩ Min.
Contact Resistance：20mΩ Max.

Assembly Layout:

PH127R-2NP-6TBKGXX 1.27mm Pitch 90° Dual Row Pin Header

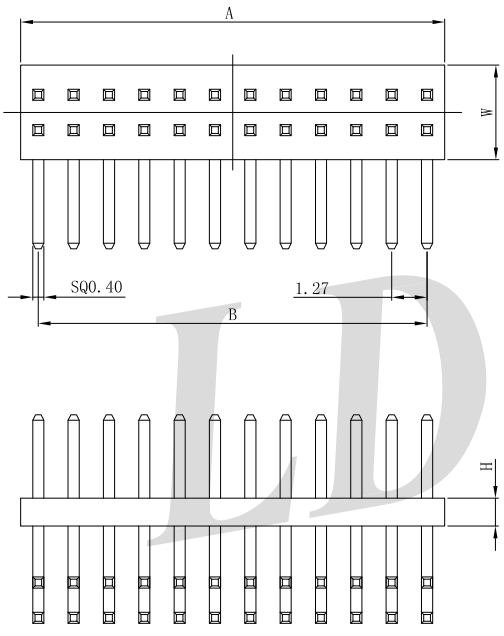



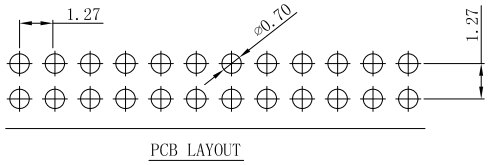

Reference Informations:
*Material:
Conduct: Phosphor Bronze/Gold Flash
Base: PA6T UL94V-0/ Black

Ordering Information & Dimensions

Poles	Dimensions (mm) A	B	Poles	Dimensions (mm) A	B
2*2P	2.54	1.27	2*27P	34.29	33.02
2*3P	3.81	2.54	2*28P	35.56	34.29
2*4P	5.08	3.81	2*29P	36.83	35.56
2*5P	6.35	5.08	2*30P	38.10	36.83
2*6P	7.62	6.35	2*31P	39.37	38.10
2*7P	8.89	7.62	2*32P	40.64	39.37
2*8P	10.16	8.89	2*33P	41.91	40.64
2*9P	11.43	10.16	2*34P	43.18	41.91
2*10P	12.70	11.43	2*35P	44.45	43.18
2*11P	13.97	12.70	2*36P	45.72	44.45
2*12P	15.24	13.97	2*37P	46.99	45.72
2*13P	16.51	15.24	2*38P	48.26	46.99
2*14P	17.78	16.51	2*39P	49.53	48.26
2*15P	19.05	17.78	2*40P	50.80	49.53
2*16P	20.32	19.05	2*41P	52.07	50.80
2*17P	21.59	20.32	2*42P	53.34	52.07
2*18P	22.86	21.59	2*43P	54.61	53.34
2*19P	24.13	22.86	2*44P	55.88	54.61
2*20P	25.40	24.13	2*45P	57.15	55.88
2*21P	26.67	25.40	2*46P	58.42	57.15
2*22P	27.94	26.67	2*47P	59.69	58.42
2*23P	29.21	27.94	2*48P	60.96	59.69
2*24P	30.48	29.21	2*49P	62.23	60.96
2*25P	31.75	30.48	2*50P	63.50	62.23
2*26P	33.02	31.75			


Option	塑高H	塑宽W	锡脚DC	上针DA	D
04	1.00	3.40	3.20	3.00	3.50
05	1.00	3.40	3.20	3.00	5.00
11	2.50	3.00	3.00	3.00	2.70

LDZY

LDZY® Electronics

PH127 Series 1.27mm Pitch Series Pin Header Connectors

PH127R-NP-6TBKGXX 1.27mm Pitch 90° Single Row Pin Header

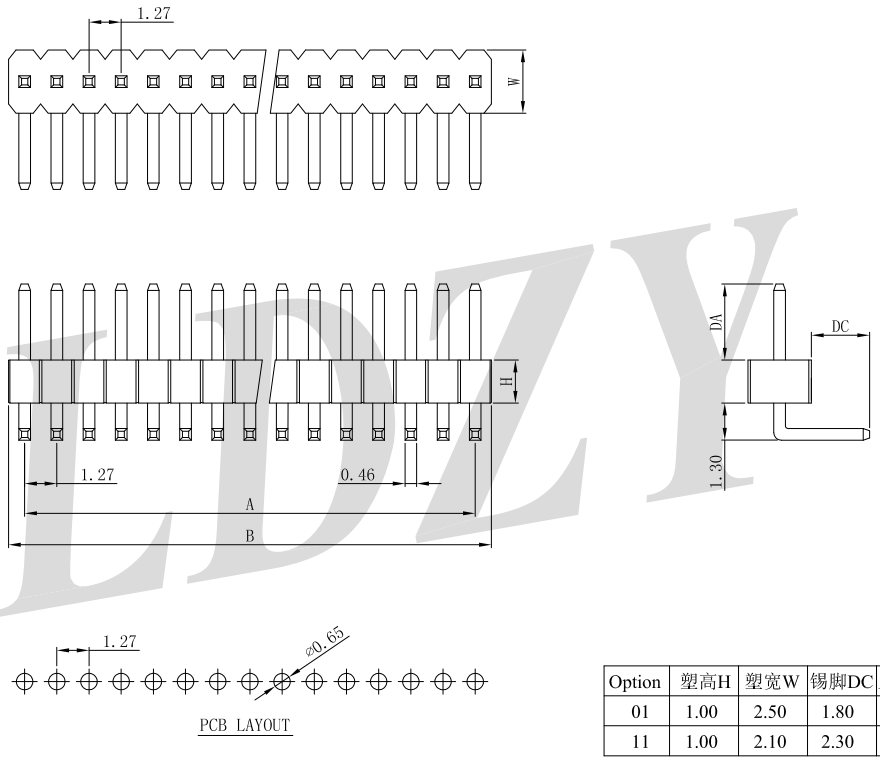



Option	塑高H	塑宽W	锡脚DC	上针DA
01	1.00	2.50	1.80	5.50
11	1.00	2.10	2.30	3.00

Reference Informations:
*Material:
Conduct: Phosphor Bronze/Gold Flash
Base: PA6T UL94V-0/ Black
Ordering Information & Dimensions

Poles	Dimensions (mm)		Poles	Dimensions (mm)	
	A	B		A	B
02	1.27	2.54	27	33.02	34.29
03	2.54	3.81	28	34.29	35.56
04	3.81	5.08	29	35.56	36.83
05	5.08	6.35	30	36.83	38.10
06	6.35	7.62	31	38.10	39.37
07	7.62	8.89	32	39.37	40.64
08	8.89	10.16	33	40.64	41.91
09	10.16	11.43	34	41.91	43.18
10	11.43	12.70	35	43.18	44.45
11	12.70	13.97	36	44.45	45.72
12	13.97	15.24	37	45.72	46.99
13	15.24	16.51	38	46.99	48.26
14	16.51	17.78	39	48.26	49.53
15	17.78	19.05	40	49.53	50.80
16	19.05	20.32	41	50.80	52.07
17	20.32	21.59	42	52.07	53.34
18	21.59	22.86	43	53.34	54.61
19	22.86	24.13	44	54.61	55.88
20	24.13	25.40	45	55.88	57.15
21	25.40	26.67	46	57.15	58.42
22	26.67	27.94	47	58.42	59.69
23	27.94	29.21	48	59.69	60.96
24	29.21	30.48	49	60.96	62.23
25	30.48	31.75	50	62.23	63.50
26	31.75	33.02			

PH127V-2NP-6TBKGXX 1.27mm Pitch 180° Dual Row Pin Header

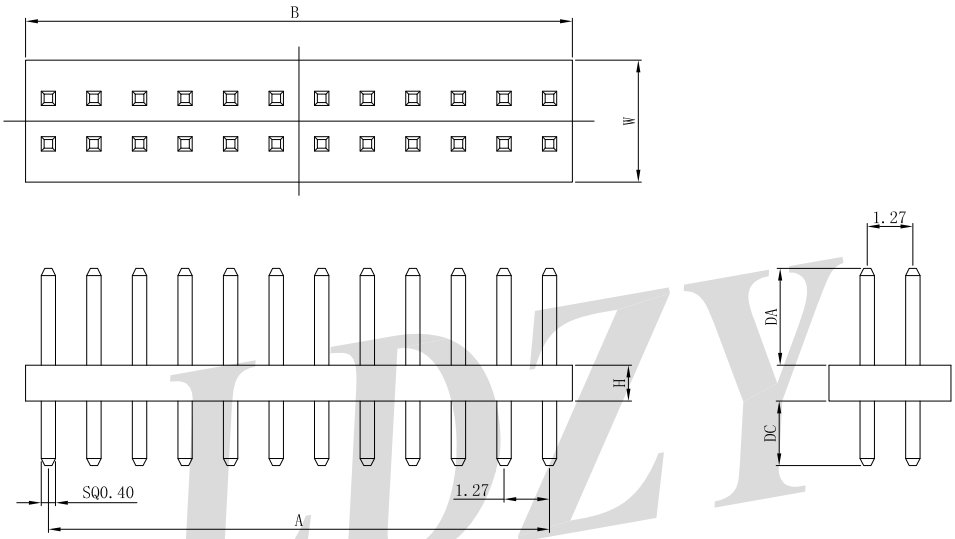

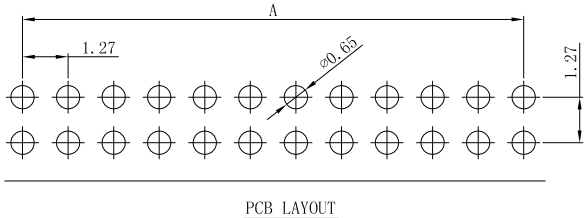

Option	塑高H	塑宽W	锡脚DC	上针DA
01	1.00	3.40	1.80	2.70
02	1.00	3.40	2.30	3.00
11	1.60	3.00	2.70	2.70


Reference Informations:
*Material:
Conduct: Phosphor Bronze/Gold Flash
Base: PA6T UL94V-0/ Black
Ordering Information & Dimensions

Poles	Dimensions (mm)		Poles	Dimensions (mm)	
	A	B		A	B
2*2P	1.27	2.54	2*27P	33.02	34.29
2*3P	2.54	3.81	2*28P	34.29	35.56
2*4P	3.81	5.08	2*29P	35.56	36.83
2*5P	5.08	6.35	2*30P	36.83	38.10
2*6P	6.35	7.62	2*31P	38.10	39.37
2*7P	7.62	8.89	2*32P	39.37	40.64
2*8P	8.89	10.16	2*33P	40.64	41.91
2*9P	10.16	11.43	2*34P	41.91	43.18
2*10P	11.43	12.70	2*35P	43.18	44.45
2*11P	12.70	13.97	2*36P	44.45	45.72
2*12P	13.97	15.24	2*37P	45.72	46.99
2*13P	15.24	16.51	2*38P	46.99	48.26
2*14P	16.51	17.78	2*39P	48.26	49.53
2*15P	17.78	19.05	2*40P	49.53	50.80
2*16P	19.05	20.32	2*41P	50.80	52.07
2*17P	20.32	21.59	2*42P	52.07	53.34
2*18P	21.59	22.86	2*43P	53.34	54.61
2*19P	22.86	24.13	2*44P	54.61	55.88
2*20P	24.13	25.40	2*45P	55.88	57.15
2*21P	25.40	26.67	2*46P	57.15	58.42
2*22P	26.67	27.94	2*47P	58.42	59.69
2*23P	27.94	29.21	2*48P	59.69	60.96
2*24P	29.21	30.48	2*49P	60.96	62.23
2*25P	30.48	31.75	2*50P	62.23	63.50
2*26P	31.75	33.02			

LDZY® Electronics

PH127 Series 1.27mm Pitch Series Pin Header Connectors

PH127V-NP-6TBKGXX 1.27mm Pitch 180° Single Row Pin Header

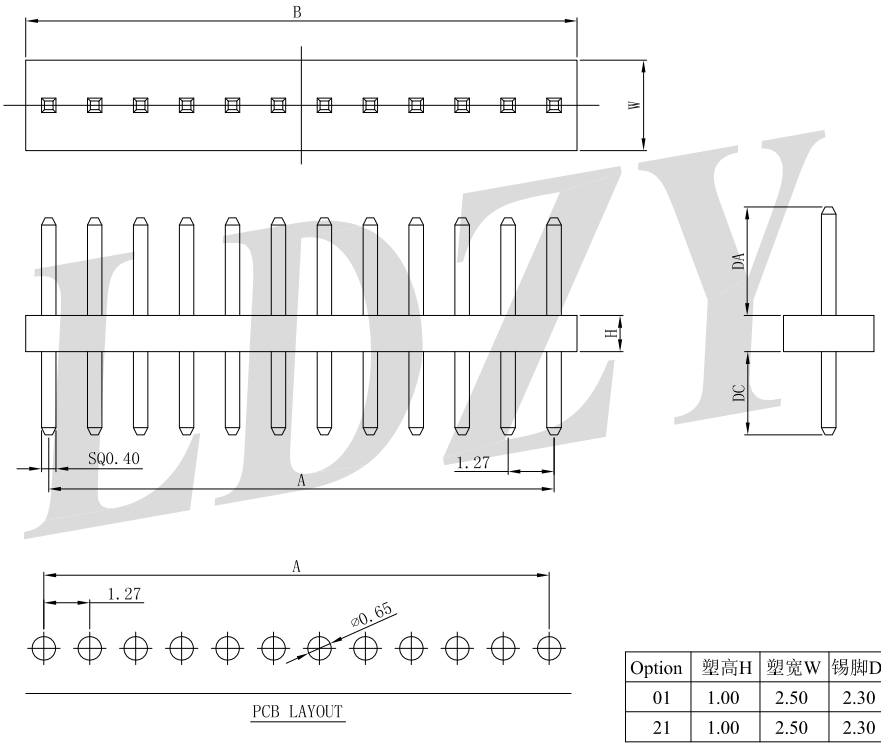


Option	塑高H	塑宽W	锡脚DC	上针DA
01	1.00	2.50	2.30	3.00
21	1.00	2.50	2.30	6.00

Reference Informations:
*Material:
Conduct: Phosphor Bronze/Gold Flash
Base: PA6T UL94V-0/ Black
Ordering Information & Dimensions

Poles	Dimensions (mm)		Poles	Dimensions (mm)	
	A	B		A	B
02	1.27	2.54	27	33.02	34.29
03	2.54	3.81	28	34.29	35.56
04	3.81	5.08	29	35.56	36.83
05	5.08	6.35	30	36.83	38.10
06	6.35	7.62	31	38.10	39.37
07	7.62	8.89	32	39.37	40.64
08	8.89	10.16	33	40.64	41.91
09	10.16	11.43	34	41.91	43.18
10	11.43	12.70	35	43.18	44.45
11	12.70	13.97	36	44.45	45.72
12	13.97	15.24	37	45.72	46.99
13	15.24	16.51	38	46.99	48.26
14	16.51	17.78	39	48.26	49.53
15	17.78	19.05	40	49.53	50.80
16	19.05	20.32	41	50.80	52.07
17	20.32	21.59	42	52.07	53.34
18	21.59	22.86	43	53.34	54.61
19	22.86	24.13	44	54.61	55.88
20	24.13	25.40	45	55.88	57.15
21	25.40	26.67	46	57.15	58.42
22	26.67	27.94	47	58.42	59.69
23	27.94	29.21	48	59.69	60.96
24	29.21	30.48	49	60.96	62.23
25	30.48	31.75	50	62.23	63.50
26	31.75	33.02			

FH127VA-NP-6TBKGXX 1.27mm Pitch 180° Single Row Pin Header

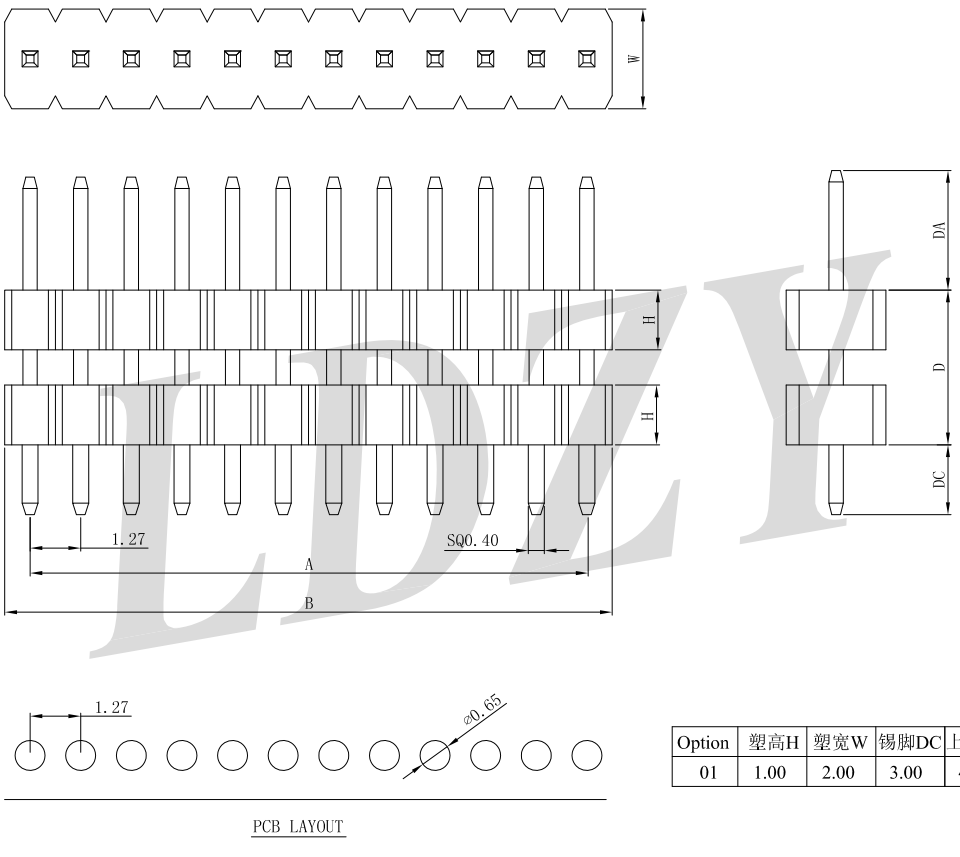

Option	塑高H	塑宽W	锡脚DC	上针DA	D
01	1.00	2.00	3.00	4.50	8.00


Reference Informations:
*Material:
Conduct: Phosphor Bronze/Gold Flash
Base: PA6T UL94V-0/ Black
Ordering Information & Dimensions


Poles	Dimensions (mm)		Poles	Dimensions (mm)	
	A	B		A	B
02	1.27	2.54	27	33.02	34.29
03	2.54	3.81	28	34.29	35.56
04	3.81	5.08	29	35.56	36.83
05	5.08	6.35	30	36.83	38.10
06	6.35	7.62	31	38.10	39.37
07	7.62	8.89	32	39.37	40.64
08	8.89	10.16	33	40.64	41.91
09	10.16	11.43	34	41.91	43.18
10	11.43	12.70	35	43.18	44.45
11	12.70	13.97	36	44.45	45.72
12	13.97	15.24	37	45.72	46.99
13	15.24	16.51	38	46.99	48.26
14	16.51	17.78	39	48.26	49.53
15	17.78	19.05	40	49.53	50.80
16	19.05	20.32	41	50.80	52.07
17	20.32	21.59	42	52.07	53.34
18	21.59	22.86	43	53.34	54.61
19	22.86	24.13	44	54.61	55.88
20	24.13	25.40	45	55.88	57.15
21	25.40	26.67	46	57.15	58.42
22	26.67	27.94	47	58.42	59.69
23	27.94	29.21	48	59.69	60.96
24	29.21	30.48	49	60.96	62.23
25	30.48	31.75	50	62.23	63.50
26	31.75	33.02			

LDZY

PH127 Series 1.27mm Pitch Series Pin Header Connectors

PH127VAS-2NP-LOBKGXX 1.27mm Pitch 180° Dual Row Pin Header

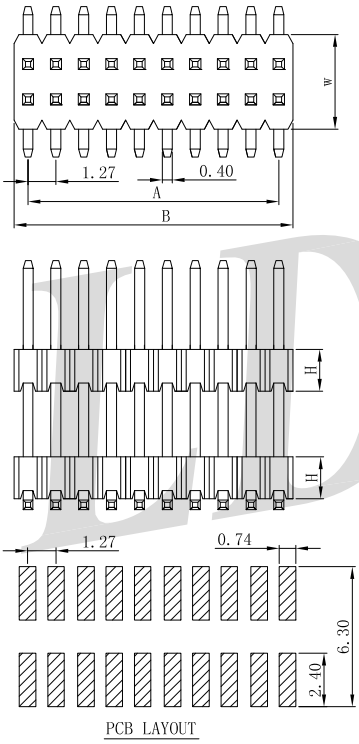





Option	塑高H	塑宽W	锡脚DC	上针DA	D
31	1.50	3.00	5.50	3.50	3.00
41	2.50	2.50	5.80	4.10	8.30


Reference Informations:
*Material:
Conduct: Phosphor Bronze/Gold Flash
Base: LCP UL94V-0/ Black
Ordering Information & Dimensions


Poles	Dimensions (mm)		Poles	Dimensions (mm)	
	A	B		A	B
2*2P	1.27	2.54	2*27P	33.02	34.29
2*3P	2.54	3.81	2*28P	34.29	35.56
2*4P	3.81	5.08	2*29P	35.56	36.83
2*5P	5.08	6.35	2*30P	36.83	38.10
2*6P	6.35	7.62	2*31P	38.10	39.37
2*7P	7.62	8.89	2*32P	39.37	40.64
2*8P	8.89	10.16	2*33P	40.64	41.91
2*9P	10.16	11.43	2*34P	41.91	43.18
2*10P	11.43	12.70	2*35P	43.18	44.45
2*11P	12.70	13.97	2*36P	44.45	45.72
2*12P	13.97	15.24	2*37P	45.72	46.99
2*13P	15.24	16.51	2*38P	46.99	48.26
2*14P	16.51	17.78	2*39P	48.26	49.53
2*15P	17.78	19.05	2*40P	49.53	50.80
2*16P	19.05	20.32	2*41P	50.80	52.07
2*17P	20.32	21.59	2*42P	52.07	53.34
2*18P	21.59	22.86	2*43P	53.34	54.61
2*19P	22.86	24.13	2*44P	54.61	55.88
2*20P	24.13	25.40	2*45P	55.88	57.15
2*21P	25.40	26.67	2*46P	57.15	58.42
2*22P	26.67	27.94	2*47P	58.42	59.69
2*23P	27.94	29.21	2*48P	59.69	60.96
2*24P	29.21	30.48	2*49P	60.96	62.23
2*25P	30.48	31.75	2*50P	62.23	63.50
2*26P	31.75	33.02			

FH127VAS-NP-6TBKG01 1.27mm Pitch 180° Single Row Pin Header

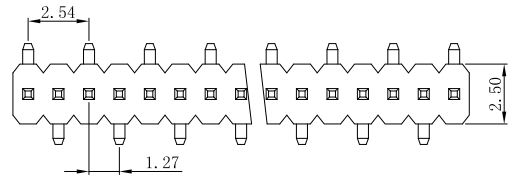

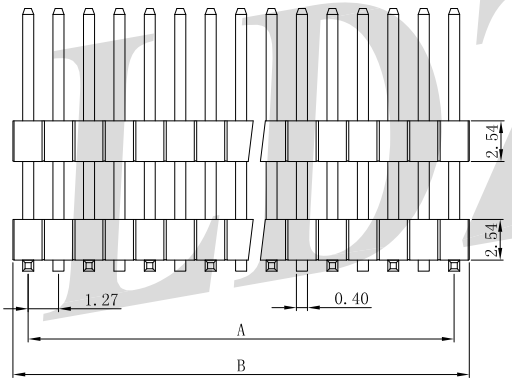



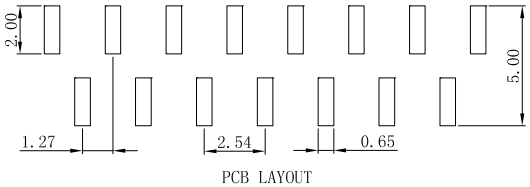


Reference Informations:
*Material:
Conduct: Phosphor Bronze/Gold Flash
Base: PA6T UL94V-0/ Black
Ordering Information & Dimensions

Poles	Dimensions (mm)		Poles	Dimensions (mm)	
	A	B		A	B
02	1.27	2.54	27	33.02	34.29
03	2.54	3.81	28	34.29	35.56
04	3.81	5.08	29	35.56	36.83
05	5.08	6.35	30	36.83	38.10
06	6.35	7.62	31	38.10	39.37
07	7.62	8.89	32	39.37	40.64
08	8.89	10.16	33	40.64	41.91
09	10.16	11.43	34	41.91	43.18
10	11.43	12.70	35	43.18	44.45
11	12.70	13.97	36	44.45	45.72
12	13.97	15.24	37	45.72	46.99
13	15.24	16.51	38	46.99	48.26
14	16.51	17.78	39	48.26	49.53
15	17.78	19.05	40	49.53	50.80
16	19.05	20.32	41	50.80	52.07
17	20.32	21.59	42	52.07	53.34
18	21.59	22.86	43	53.34	54.61
19	22.86	24.13	44	54.61	55.88
20	24.13	25.40	45	55.88	57.15
21	25.40	26.67	46	57.15	58.42
22	26.67	27.94	47	58.42	59.69
23	27.94	29.21	48	59.69	60.96
24	29.21	30.48	49	60.96	62.23
25	30.48	31.75	50	62.23	63.50
26	31.75	33.02			

PH127 Series 1.27mm Pitch Series Pin Header Connectors


PH127VFS-2NP-6TBKG01 1.27mm Pitch 180° Dual Row Pin Header

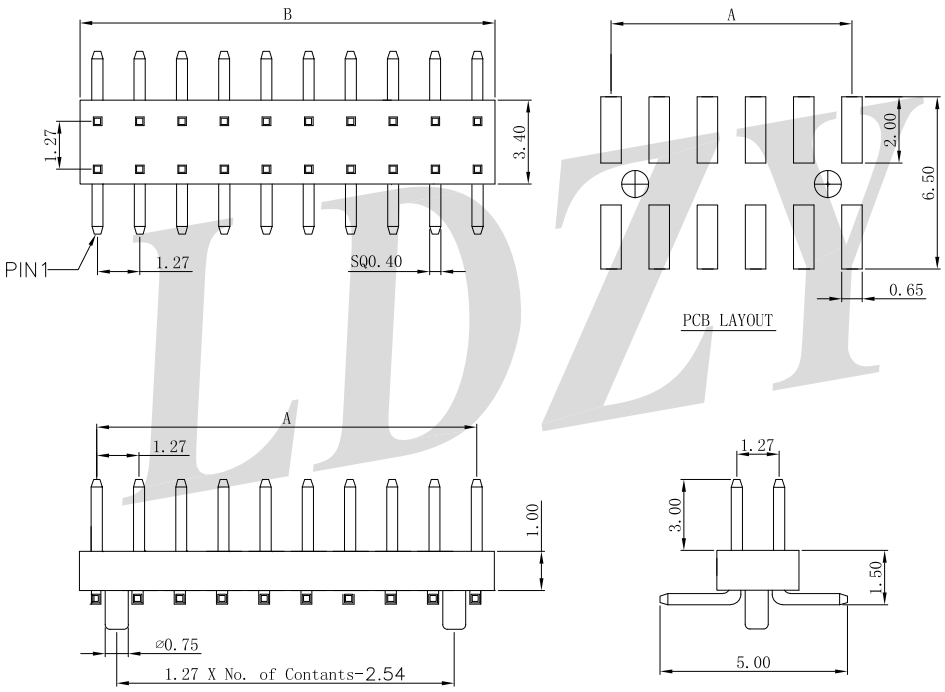

Reference Informations:
*Material:
Conduct: Phosphor Bronze/Gold Flash
Base: PA6T UL94V-0/ Black
Ordering Information & Dimensions

Poles	Dimensions (mm)		Poles	Dimensions (mm)	
	A	B		A	B
2*2P	1.27	2.54	2*27P	33.02	34.29
2*3P	2.54	3.81	2*28P	34.29	35.56
2*4P	3.81	5.08	2*29P	35.56	36.83
2*5P	5.08	6.35	2*30P	36.83	38.10
2*6P	6.35	7.62	2*31P	38.10	39.37
2*7P	7.62	8.89	2*32P	39.37	40.64
2*8P	8.89	10.16	2*33P	40.64	41.91
2*9P	10.16	11.43	2*34P	41.91	43.18
2*10P	11.43	12.70	2*35P	43.18	44.45
2*11P	12.70	13.97	2*36P	44.45	45.72
2*12P	13.97	15.24	2*37P	45.72	46.99
2*13P	15.24	16.51	2*38P	46.99	48.26
2*14P	16.51	17.78	2*39P	48.26	49.53
2*15P	17.78	19.05	2*40P	49.53	50.80
2*16P	19.05	20.32	2*41P	50.80	52.07
2*17P	20.32	21.59	2*42P	52.07	53.34
2*18P	21.59	22.86	2*43P	53.34	54.61
2*19P	22.86	24.13	2*44P	54.61	55.88
2*20P	24.13	25.40	2*45P	55.88	57.15
2*21P	25.40	26.67	2*46P	57.15	58.42
2*22P	26.67	27.94	2*47P	58.42	59.69
2*23P	27.94	29.21	2*48P	59.69	60.96
2*24P	29.21	30.48	2*49P	60.96	62.23
2*25P	30.48	31.75	2*50P	62.23	63.50
2*26P	31.75	33.02			

FH127VS-2NP-6TBKGXX 1.27mm Pitch 180° Dual Row Pin Header

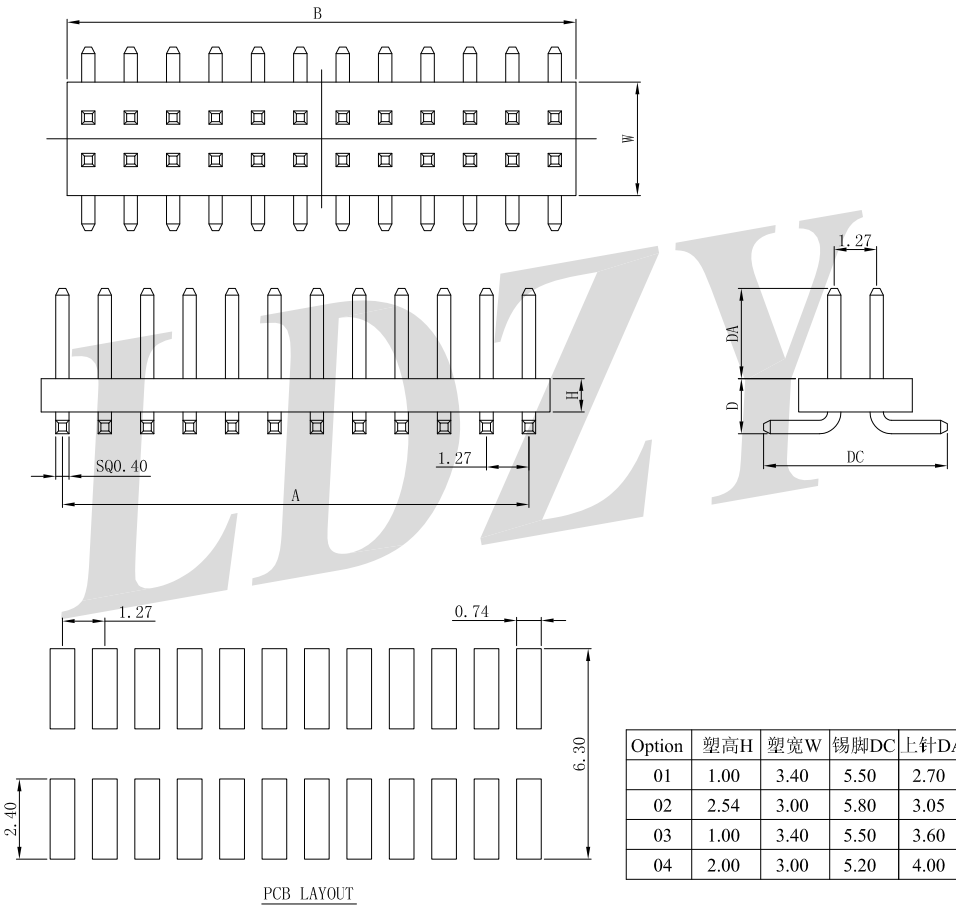

Reference Informations:
*Material:
Conduct: Phosphor Bronze/Gold Flash
Base: PA6T UL94V-0/ Black
Ordering Information & Dimensions

Poles	Dimensions (mm)		Poles	Dimensions (mm)	
	A	B		A	B
2*2P	1.27	2.54	2*27P	33.02	34.29
2*3P	2.54	3.81	2*28P	34.29	35.56
2*4P	3.81	5.08	2*29P	35.56	36.83
2*5P	5.08	6.35	2*30P	36.83	38.10
2*6P	6.35	7.62	2*31P	38.10	39.37
2*7P	7.62	8.89	2*32P	39.37	40.64
2*8P	8.89	10.16	2*33P	40.64	41.91
2*9P	10.16	11.43	2*34P	41.91	43.18
2*10P	11.43	12.70	2*35P	43.18	44.45
2*11P	12.70	13.97	2*36P	44.45	45.72
2*12P	13.97	15.24	2*37P	45.72	46.99
2*13P	15.24	16.51	2*38P	46.99	48.26
2*14P	16.51	17.78	2*39P	48.26	49.53
2*15P	17.78	19.05	2*40P	49.53	50.80
2*16P	19.05	20.32	2*41P	50.80	52.07
2*17P	20.32	21.59	2*42P	52.07	53.34
2*18P	21.59	22.86	2*43P	53.34	54.61
2*19P	22.86	24.13	2*44P	54.61	55.88
2*20P	24.13	25.40	2*45P	55.88	57.15
2*21P	25.40	26.67	2*46P	57.15	58.42
2*22P	26.67	27.94	2*47P	58.42	59.69
2*23P	27.94	29.21	2*48P	59.69	60.96
2*24P	29.21	30.48	2*49P	60.96	62.23
2*25P	30.48	31.75	2*50P	62.23	63.50
2*26P	31.75	33.02			

Option	塑高H	塑宽W	锡脚DC	上针DA	D
01	1.00	3.40	5.50	2.70	1.65
02	2.54	3.00	5.80	3.05	3.64
03	1.00	3.40	5.50	3.60	1.65
04	2.00	3.00	5.20	4.00	2.40