

C4140Series 4.14mm Pitch Series Wire to Wire Connectors

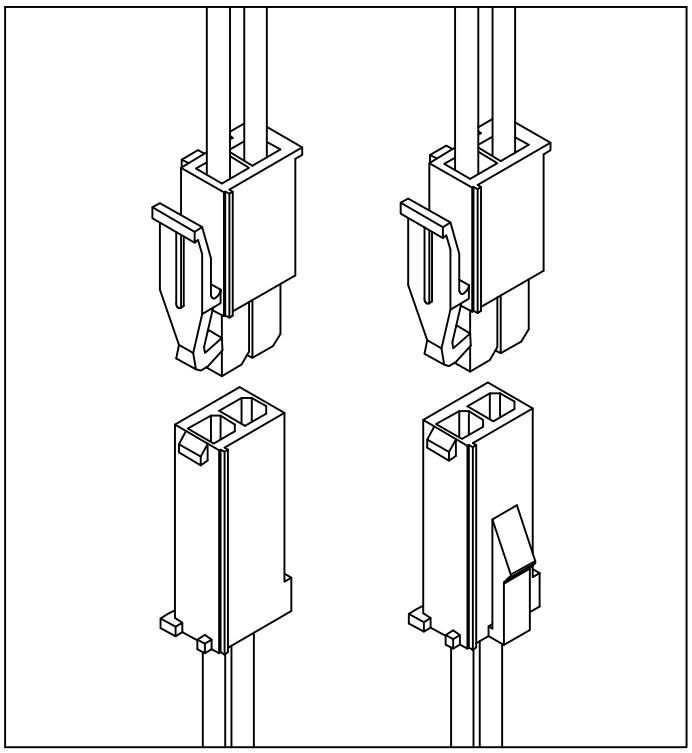


SPECIFICATIONS:

Voltage Rating：300V AC/DC
Current Rating：8A AC/DC
Withstanding Voltage：1500V AC/Minute
Temperature Range：-25°C~+85°C
Insulation Resistance：1000MΩ Min.
Contact Resistance：20mΩ Max.
Applicable Wire Range：AWG#18~26.

Assembly Layout:

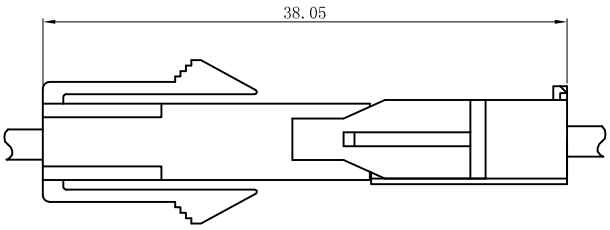

C4140HF-XNP-NONA 4.14mm Pitch Single/Dual Row Housing

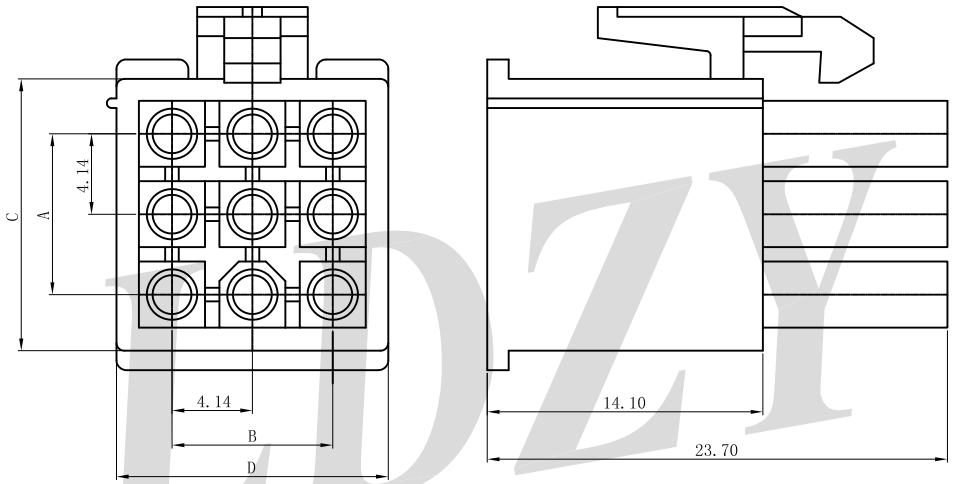


Reference Informations:
*Material:
Housing: PA66 UL94V-0/Natrual
*Suitable LDZY C4140 series Terminal
*Mates with LDZY C4140 series Wafer
Ordering Information & Dimensions

Poles	Dimensions (mm)			
	A	B	C	D
01	0	0	5.60	5.60
02	4.14	0	9.80	5.60
03	8.28	0	14.00	5.60
2*2P	4.14	4.14	9.80	9.80
2*3P	4.14	8.28	9.80	14.00
3*3P	8.28	8.28	14.00	14.00
3*4P	8.28	12.42	14.00	18.20
3*5P	8.28	16.56	14.00	22.40

LDZY

C4140 Series 4.14mm Pitch Series Wire to Wire Connectors

C4140HM-XNP-NONA 4.14mm Pitch Single/Dual Row Housing

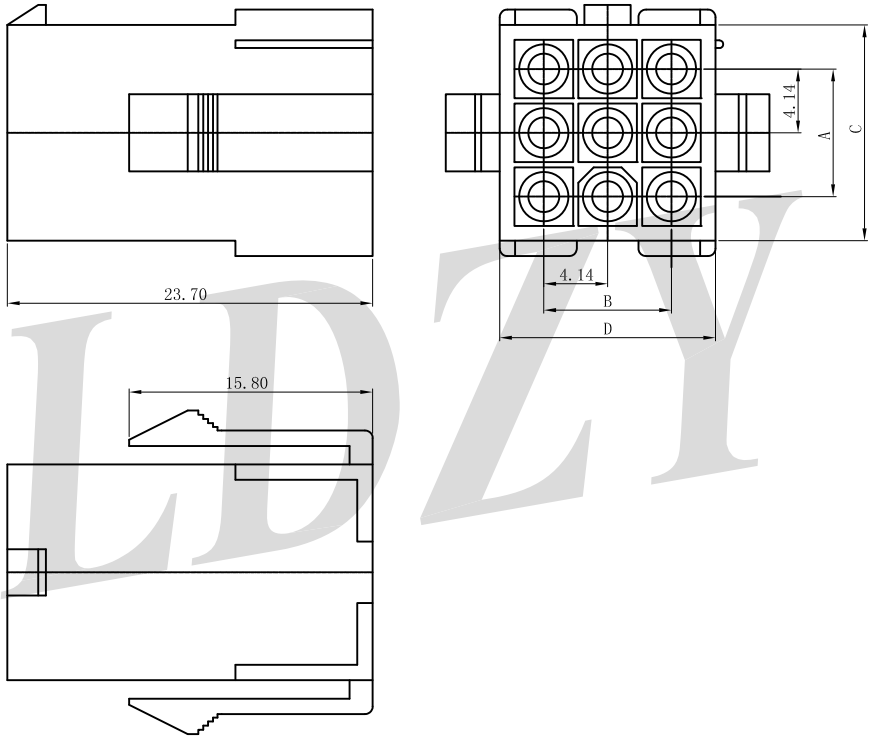


Reference Informations:
*Material:
Housing: PA66 UL94V-0/Natrual
*Suitable LDZY C4140 series Terminal
*Mates with LDZY C4140 Female Housing

Ordering Information & Dimensions

Poles	Dimensions (mm)			
	A	B	C	D
01	0	0	5.60	5.60
02	4.14	0	9.80	5.60
03	8.28	0	14.00	5.60
2*2P	4.14	4.14	9.80	9.80
2*3P	4.14	8.28	9.80	14.00
3*3P	8.28	8.28	14.00	14.00
3*4P	8.28	12.42	14.00	18.20
3*5P	8.28	16.56	14.00	22.40

C4140TF-PT1 3.70mm Pitch Terminal

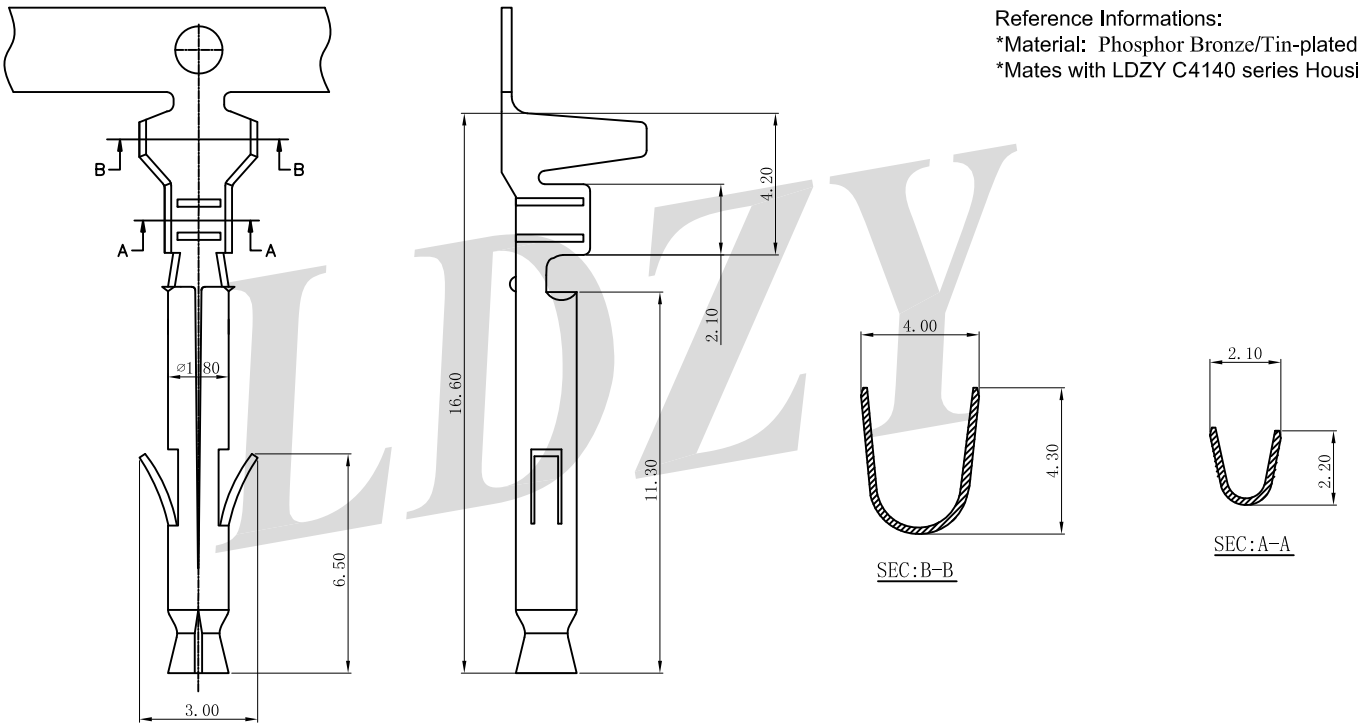

Reference Informations:
*Material: Phosphor Bronze/Tin-plated
*Mates with LDZY C4140 series Housing


Ordering Information & Specifications

Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
C4140TF-PT1	AWG#18-#26	2.60mm(max)	Phosphor Bronze	Tin-plated	4,500pcs

C4140 Series 4.14mm Pitch Series Wire to Wire Connectors

C4140TM-PT1 4.14mm Pitch Terminal

Reference Informations:
*Material: Phosphor Bronze/Tin-plated
*Mates with LDZY C4140 series Housing

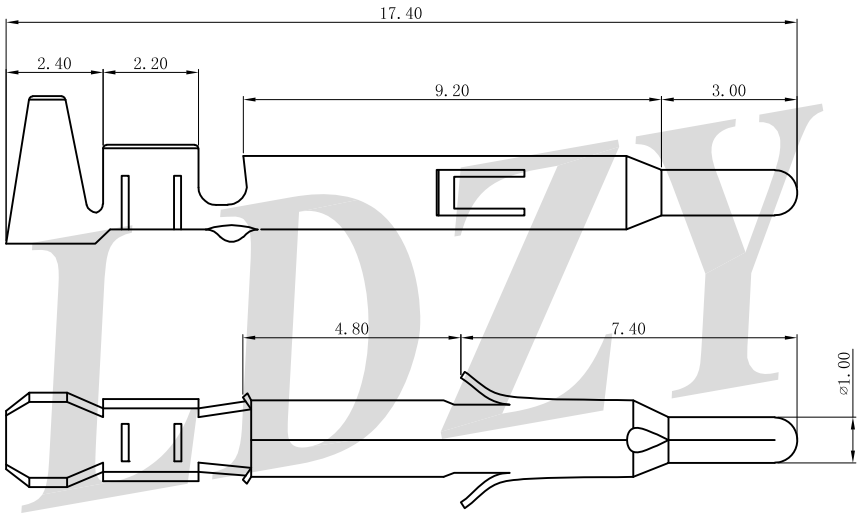

Ordering Information & Specifications


Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
C4140TM-PT1	AWG#18-#26	2.60mm(max)	Phosphor Bronze	Tin-plated	4,500pcs

C4140WRF-2NP-NOWHX 4.14mm Pitch 90° Dual Row Wafer

Reference Informations:
*Material:
PIN: Brass/Tin-plated or Gold-Flash
Wafer: PA66,UL94V-0 White
*Suitable LDZY C4140 series Housing

Ordering Information & Dimensions


Poles	Dimensions (mm)	
	A	B
2*2p	4.14	9.83
2*3P	8.28	13.97
2*4P	12.42	18.11
2*5P	16.56	22.25
2*6P	20.70	26.39

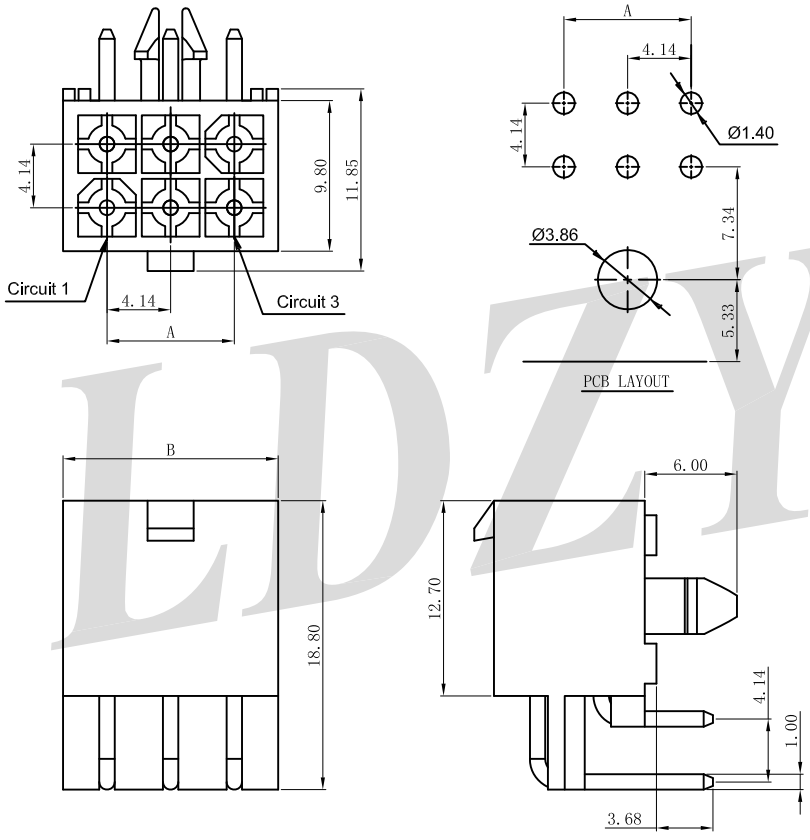

LDZY

C4140 Series 4.14mm Pitch Series Wire to Wire Connectors

C4140WVA-03-N2NAT 4.14mm Pitch 180° Single Row Wafer

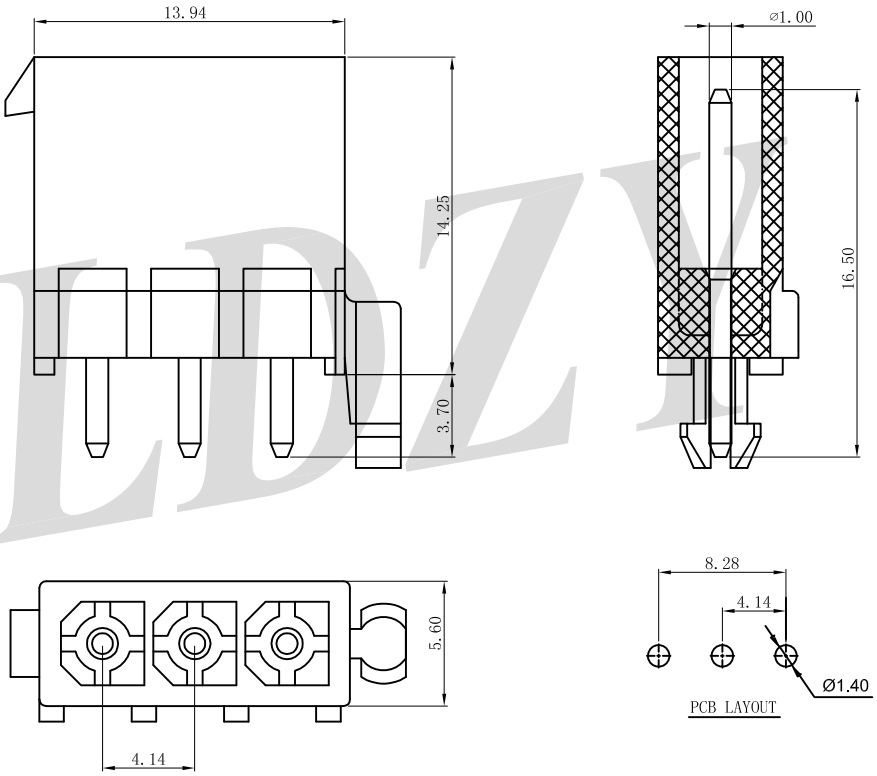

Reference Informations:
*Material:
PIN: Brass/Tin-plated
Wafer: PA66,UL94V-2 Natrual
*Suitable LDZY C4140 series Housing

LDZY