

C6350Series 6.35mm Pitch Series Wire to Wire Connectors

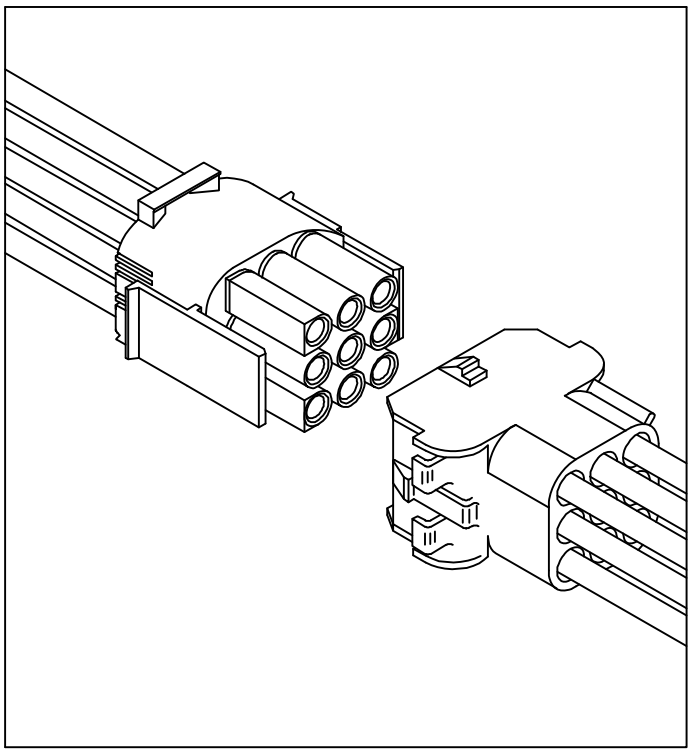


SPECIFICATIONS:


Voltage Rating：600V AC/DC
Current Rating：15A AC/DC
Withstanding Voltage：5000V AC/Minute
Temperature Range：-25°C~+85°C
Insulation Resistance：1000MΩ Min.
Contact Resistance：3.5mΩ Max.
Applicable Wire Range：AWG#14~20.


Assembly Layout:




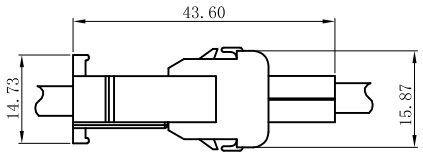



C6350HF-NP-NONA 6.35mm Pitch Single Row Housing

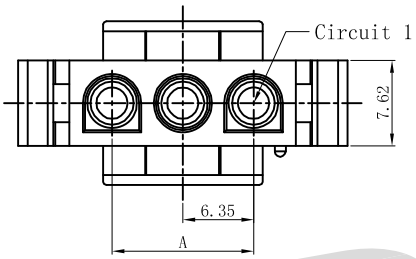



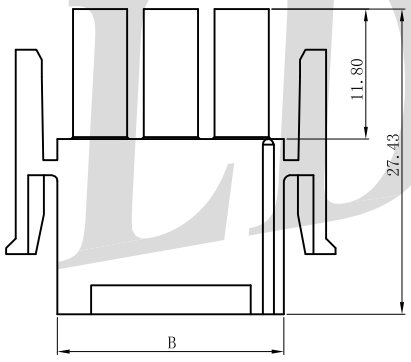

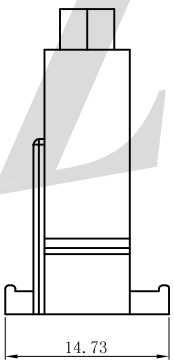




Reference Informations:
*Material:
Housing: PA66 UL94V-0/Natrual
*Suitable LDZY C6350 series Terminal
*Mates with LDZY C6350 series Wafer
Ordering Information & Dimensions


Poles	Dimensions (mm)	
	A	B
02	6.35	13.97
03	12.70	20.32
04	19.05	26.67
05	25.40	33.02
06	31.75	39.37
08	44.45	52.07

LDZY

C6350 Series 6.35mm Pitch Series Wire to Wire Connectors

C6350HF-XNP-NONA 6.35mm Pitch Single/Dual Row Housing

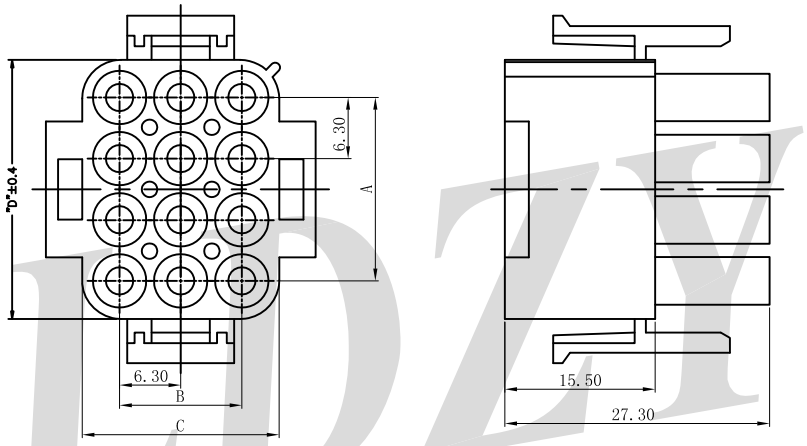


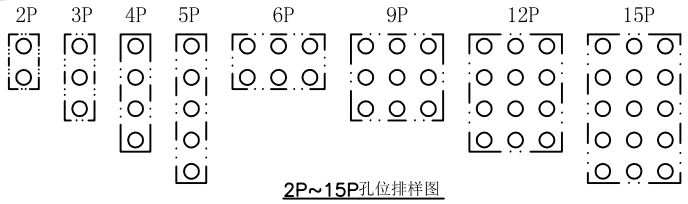


2P~15P孔位排样图


Reference Informations:
*Material:
Housing: PA66 UL94V-0/Natrual
*Suitable LDZY C6350 series Terminal
*Mates with LDZY C6350 series Wafer
Ordering Information & Dimensions

Poles	Dimensions (mm)			
	A	B	C	D
02	6.30	-	7.60	14.00
03	12.60	-	7.60	20.30
04	18.90	-	7.60	26.60
05	25.20	-	7.60	32.90
06	6.30	12.60	20.30	14.00
09	12.60	12.60	20.30	20.30
12	18.90	12.60	20.30	26.60
15	25.20	12.60	20.30	32.90



C6350HM-NP-NONA 6.35mm Pitch Single Row Housing

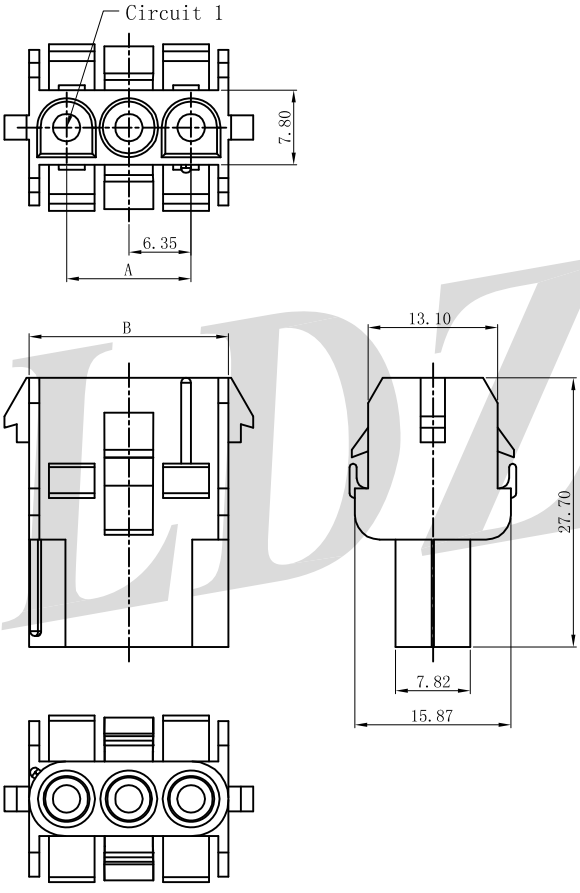





Reference Informations:
*Material:
Housing: PA66 UL94V-0/Natrual
*Suitable LDZY C6350 series Terminal
*Mates with LDZY C6350 Female Housing
Ordering Information & Dimensions

Poles	Dimensions (mm)	
	A	B
02	6.35	13.97
03	12.70	20.32
04	19.05	26.67
05	25.40	33.02
06	31.75	39.37
08	44.45	52.07

C6350 Series 6.35mm Pitch Series Wire to Wire Connectors

C6350HM-XNP-NONA 6.35mm Pitch Single/Dual Row Housing

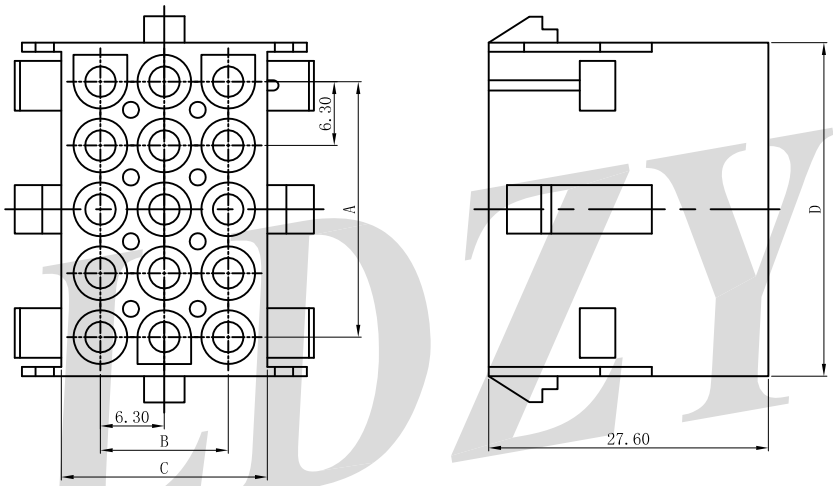

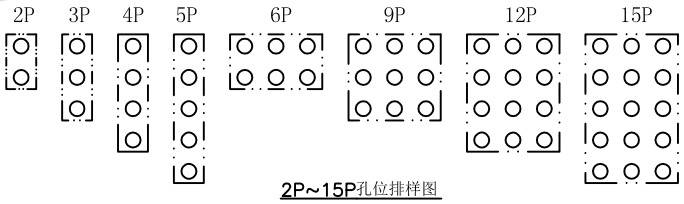


2P~15P孔位排样图


Reference Informations:
*Material:
Housing: PA66 UL94V-0/Natrual
*Suitable LDZY C6350 series Terminal
*Mates with LDZY C6350 Female Housing


Ordering Information & Dimensions


Poles	Dimensions (mm)			
	A	B	C	D
02	6.30	-	7.60	14.00
03	12.60	-	7.60	20.30
04	18.90	-	7.60	26.60
05	25.20	-	7.60	32.90
06	6.30	12.60	20.30	14.00
09	12.60	12.60	20.30	20.30
12	18.90	12.60	20.30	26.60
15	25.20	12.60	20.30	32.90




C6350TF-PT1 6.35mm Pitch Terminal

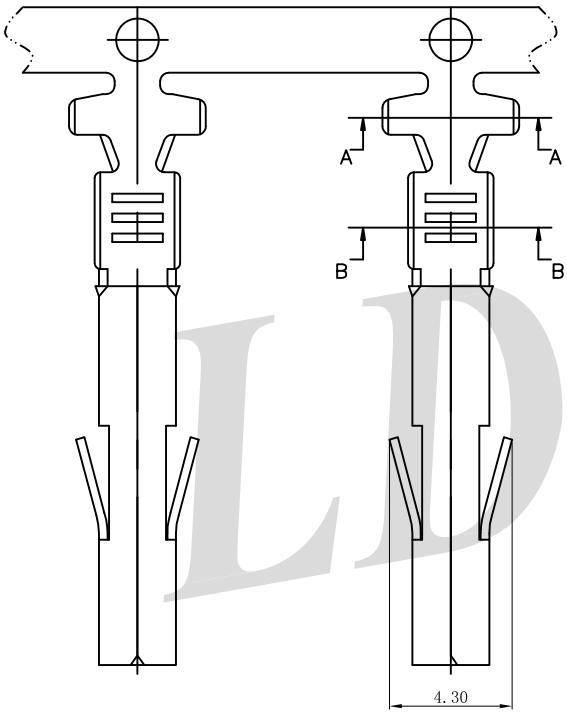

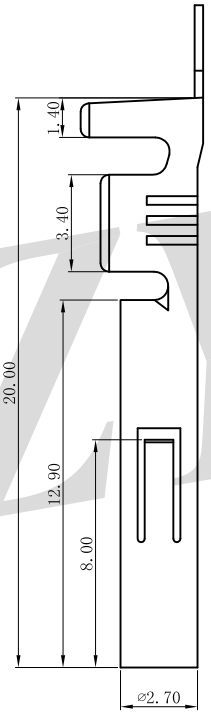



SEC:A-A



SEC:B-B


Reference Informations:
*Material: Phosphor Bronze/Tin-plated
*Mates with LDZY C6350 series Housing


Ordering Information & Specifications

Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
C6350TF-PT1	AWG#14-#20	3.30mm(max)	Phosphor Bronze	Tin-plated	3,500pcs


C6350 Series 6.35mm Pitch Series Wire to Wire Connectors

C6350TM-PT1 6.35mm Pitch Terminal

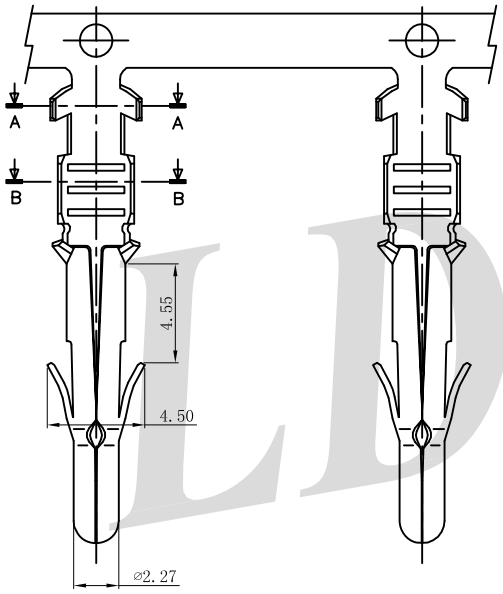


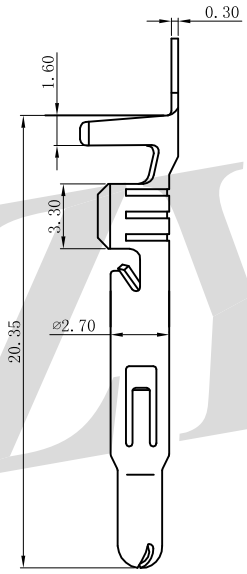

Reference Informations:
*Material: Phosphor Bronze/Tin-plated
*Mates with LDZY C6350 series Housing



SEC:A-A





SEC:B-B


Ordering Information & Specifications

Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
C6350TM-PT1	AWG#14-#20	3.30mm(max)	Phosphor Bronze	Tin-plated	4,000pcs

C6350WRA-NP-XXNAT 6.35mm Pitch 90° Single Row Wafer

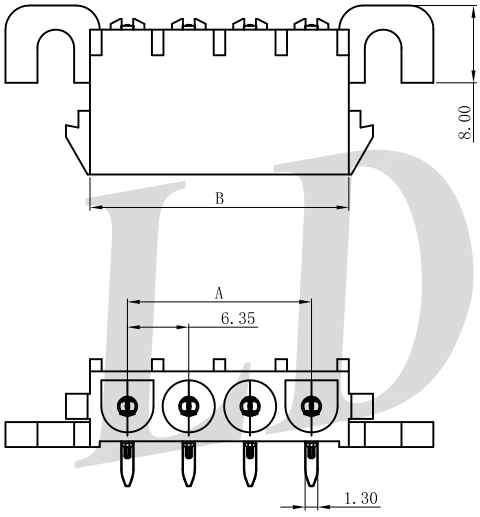

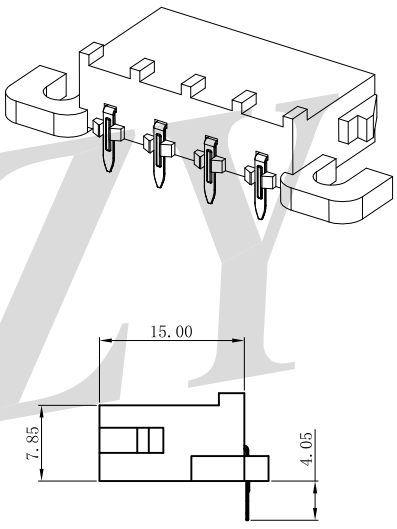

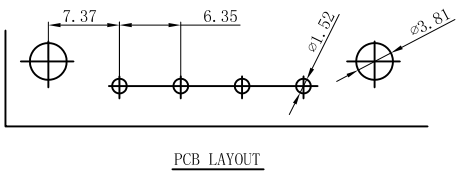


PCB LAYOUT

Reference Informations:
*Material:
PIN: Brass/Tin-plated
Wafer: PA66 UL94V-2/Natrual
PA66 UL94V-0/White
*Suitable LDZY C6350 series Housing
Ordering Information & Dimensions

Poles	Dimensions (mm)	
	A	B
02	6.35	14.10
03	12.70	20.45
04	19.05	26.80
05	25.40	33.16
06	31.75	39.50
07	38.10	45.85
08	44.45	52.20

C6350 Series 6.35mm Pitch Series Wire to Wire Connectors

C6350WV-NP-N2NAT 6.35mm Pitch 180° Single Row Wafer

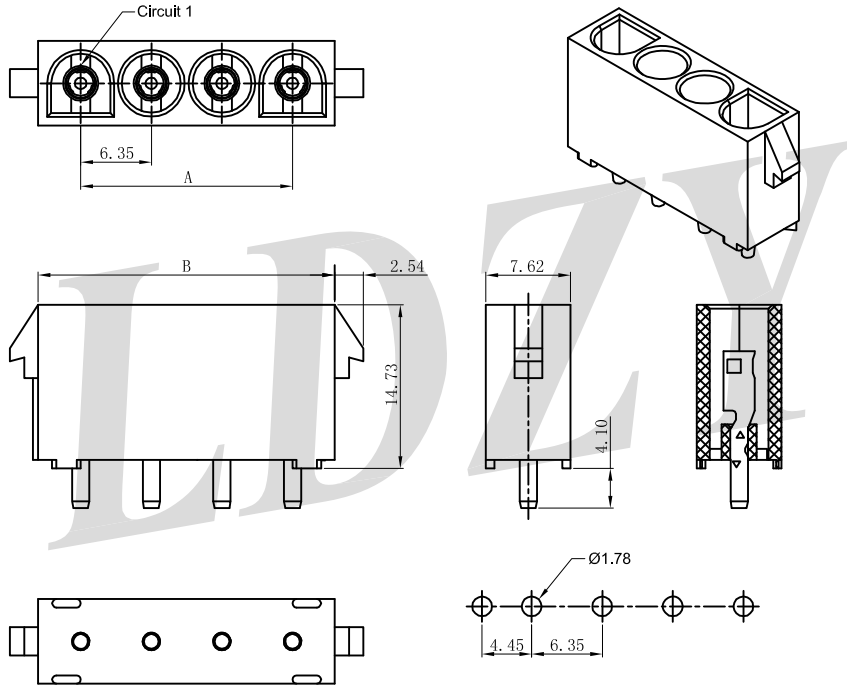


P.C.B LAYOUT

Reference Informations:
*Material:
PIN: Brass/Tin-plated
Wafer: PA66 UL94V-2/Natrual
*Suitable LDZY C6350 series Housing
Ordering Information & Dimensions

Poles	Dimensions (mm)	
	A	B
02	6.35	13.97
03	12.70	20.32
04	19.05	26.67
05	25.40	33.02
06	31.75	39.37
08	44.45	52.07

C6350WV-2NP-N2NAT 6.35mm Pitch 180° Dual Row Wafer

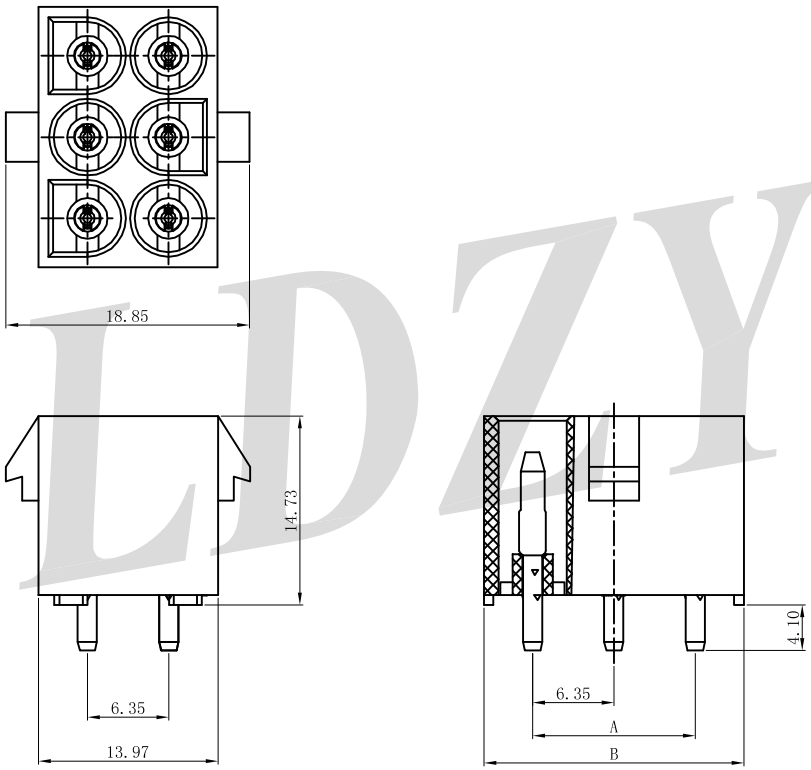



Reference Informations:
*Material:
PIN: Brass/Tin-plated
Wafer: PA66 UL94V-2/Natrual
*Suitable LDZY C6350 series Housing
Ordering Information & Dimensions


Poles	Dimensions (mm)	
	A	B
2*2P	6.35	13.97
2*3P	12.70	20.32
2*4P	19.05	26.67
2*5P	25.40	33.02


C6350 Series 6.35mm Pitch Series Wire to Wire Connectors


C6350WV-3NP-NONAT 6.35mm Pitch 180° Three Row Wafer














Reference Informations:
*Material:
PIN: Brass/Tin-plated
Wafer: PA66 UL94V-0/Natrual
*Suitable LDZY C6350 series Housing

Ordering Information & Dimensions

Poles	Dimensions (mm)	
	A	B
3*2P	6.35	13.97
3*3P	12.70	20.32
3*4P	19.05	26.67
3*5P	25.40	33.02

LDZY